

# PREMADE CABLE

---

VP Cable, BNC (Male to Male) + DC (Male to Female)



## Features

- For 1081P HD camera
- Easy to install
- Independent earth wire
- Anti-interference ability


# PREMADE CABLE

## VP Cable, BNC (Male to Male) + DC (Male to Female)

### Cable Specifications

| Models                       | W-VP25HD/B-V2                                   | W-VP50HD/B-V2 | W-VP100HD/B-V2 | W-VP150HD/B-V2 |
|------------------------------|-------------------------------------------------|---------------|----------------|----------------|
|                              | W-VP25HD/W-V2                                   | W-VP50HD/W-V2 | W-VP100HD/W-V2 | W-VP150HD/W-V2 |
| Cable Construction           |                                                 |               |                |                |
| FOR Video Side               |                                                 |               |                |                |
| Conductor                    | 1C*8/0.12 Pure Copper with Shield (38/0.12 CCA) |               |                |                |
| Insulation                   | PE, ID: 1.5±0.05mm                              |               |                |                |
| Jacket                       | PVC, OD: 3.1±0.1mm                              |               |                |                |
| FOR Power Side               |                                                 |               |                |                |
| Conductor                    | (30/0.14 BC) Red + (25/0.14CCA) Black           |               |                |                |
| Insulation                   | PVC, Red: ID 1.42mm, Black 1.25mm               |               |                |                |
| Jacket                       | PVC, OD:4.1±0.1mm                               |               |                |                |
| Connectors                   | Iron & Copper                                   |               |                |                |
| Electrical Characteristic    |                                                 |               |                |                |
| Impedance                    | 50 or 75 +/-2 Ohm                               |               |                |                |
| Operating temperature        | -20℃ + 75℃                                      |               |                |                |
| Standard Reference           |                                                 |               |                |                |
| 1. CE                        |                                                 |               |                |                |
| 2. RoHS                      |                                                 |               |                |                |
| Applications                 |                                                 |               |                |                |
| 1. Closed Circuit Television |                                                 |               |                |                |
| 2. CCTV Cameras              |                                                 |               |                |                |
| Packing Way                  |                                                 |               |                |                |
| 1. Plastic bag with label    |                                                 |               |                |                |
| 2. Carton                    |                                                 |               |                |                |
| 3.Packing Qty.(PCS/CTN)      | 30                                              | 30            | 10             | 10             |

### Dimensions (mm)

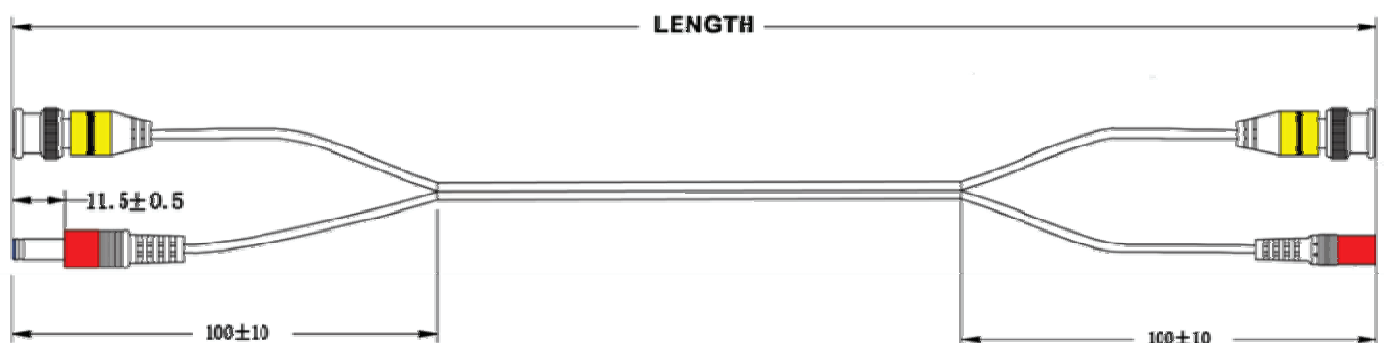

**Winic Technologies USA Inc.**

1(631)396-0800 | 42 Central Ave. Farmingdale, NY 11735 | [www.winictech.com](http://www.winictech.com)