


# AC602-DAC



## Double-door Access Controller

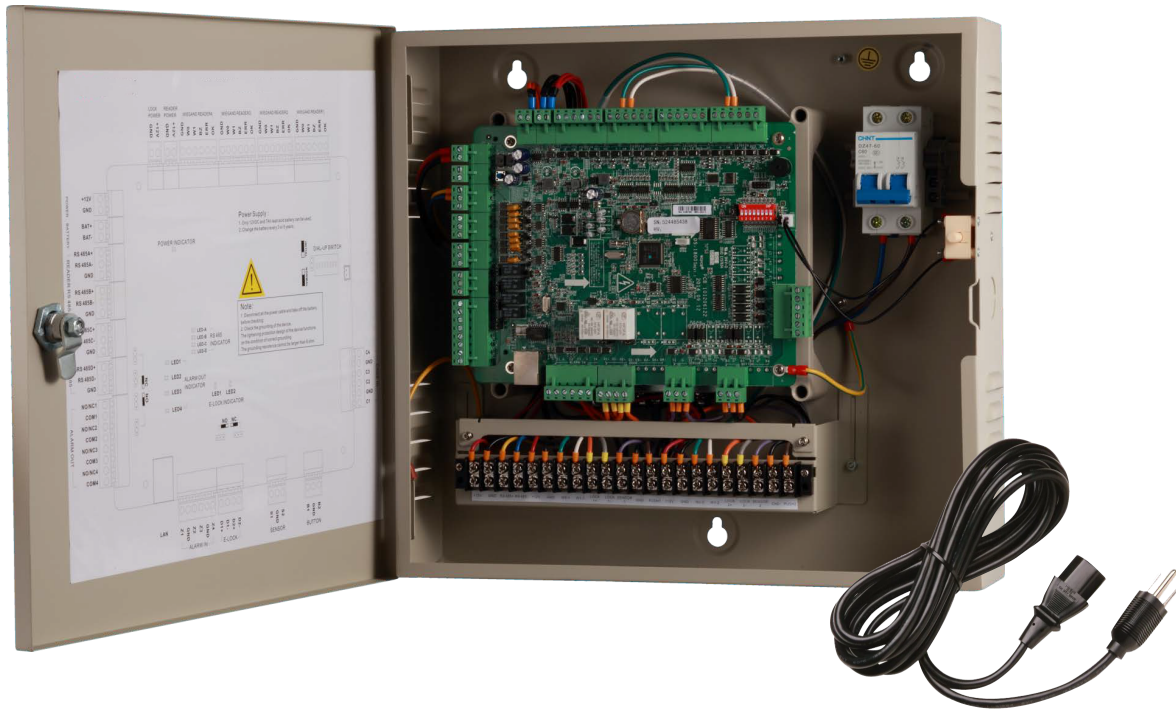

AC602-DAC access controller is designed with latest structure with TCP/IP and RS485 communication interface. The communication data is encrypted to improve the security of system. The controller also supports offline operation and is designed with tamper-proof switch.


### MAIN FEATURES

- 32-bit high-speed processor
- TCP/IP network communication, with self-adaptive network interface. The communication data is encrypted to ensure information security
- The recognition and storage of card number with maximum 20 digits
- Massive storage with 100,000 cards information and 300,000
- Supports multi-door interlocking function (AC602-DAC ,AC604-DAC, anti-passback function, multi-card function, first card function, super card and super password function
- Online upgrade function and online remote control of the doors
- Supports alarm event upload (including tamper-proof alarm, unsecured door alarm, forced entry alarm, delayed door alarm, duress card and code alarm, blacklist alarm and alarm for invalid card swiping attempts alarm)
- Short circuit attempts alarm and open circuit attempts alarm
- Supports zone alarm input
- Supports RS485 interface and Wiegand interface for accessing card reader. Wiegand interface supports W26/W34 and is seamlessly compatible with third-party card reader with Wiegand interface
- Supports various card types such as normal/ disabled/ blacklist/ patrol/ guest/ duress/ super card, etc.
- Various indicators to show different device status
- Supports time synchronization via NTP, manual or automatic method
- Supports standby battery


## Double-door Access Controller

- Watchdog for device running status detection
- Data can be permanently saved when the access controller is powered off

### TYPICAL APPLICATION

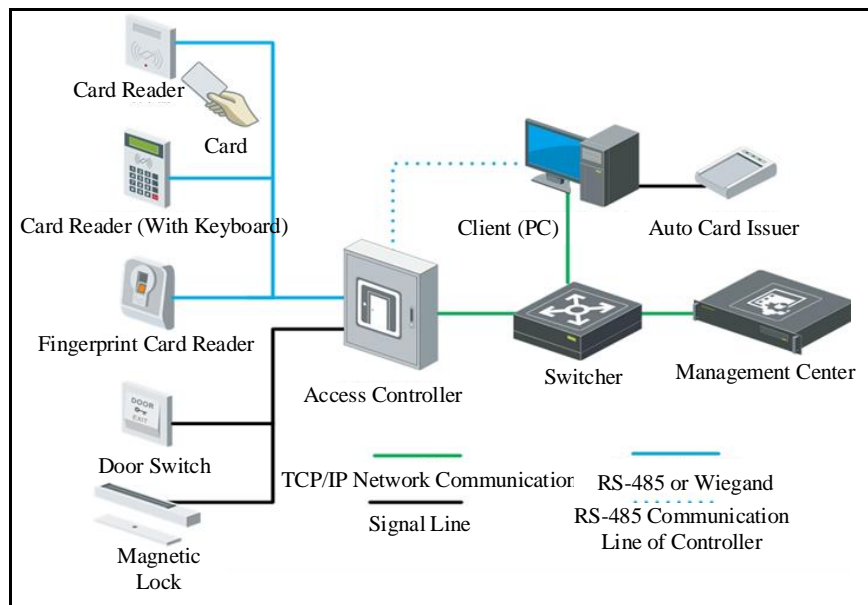

Topological Graph

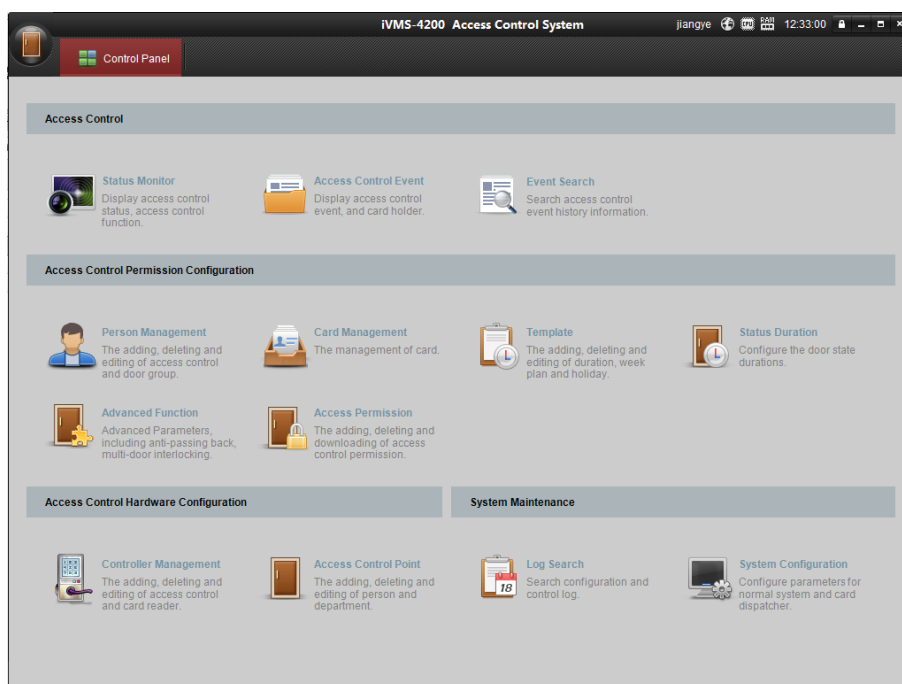

Client Software Interface

# AC602-DAC



## Double-door Access Controller

Model	AC602-DAC
Working Voltage	DC 12V/1A
Power Dissipation (with Load)	≤100W
Power Dissipation (Without Load)	≤4W
Processor	32-bit
Capacity	16M
Uplink Communication Interface	TCP/IP, RS-485
Downlink Communication Interface	RS-485, Wiegand (W26/W34)
Storage	Cards Information: 100,000 Access Control Events : 300,000
LED Indicator	Power Supply Status, Communication Status, Working Status
Built-in Clock	Yes
Accessible Card Reader	4 Card Readers (RS485 Interface); 4 Card Readers (Wiegand Interface)
Input Interface	Alarm Input × 4, Door Sensor × 2, Exit Button × 2, Case Input × 4, Tamper Alarm × 1
Output Interface	Door Relay × 2, Alarm Relay × 4
Working Temperature	-20°C to +65°C (-4°F to +149°F)
Working Humidity	10% to 90% (Non-Condensing)

# AC602-DAC



## Double-door Access Controller

<b>Model</b>	<b>AC602-DAC</b>	
<b>Dimensions (L×W×H)</b>	450mm(L) x 400mm(w) x 100(H)	
<b>Certification</b>	CE, FCC	