

HDC-DI3A02/5M-2812-B (W)

5.0 Megapixel 1944P HD 4 In 1 Cameras



Features

- 1/2.5" 5.0 Megapixel CMOS
 - R Led:3pcs Array
 - NTSC:5MP:20FPS/4MP:30FPS,15FPS
PAL:5MP:12.5FPS/ 4MP:25FPS,12.5FPS
 - Long Distance, No delay
 - Support ICR auto switch
 - Support AHD/ CVI/ TVI/ Analog transfer
-

HDC-DI3A02/5M-2812-B (W)

5.0 Megapixel 1944P HD 4 In 1 Cameras

Specifications

Camera	
Image Sensor	1/2.5" 5.0 Megapixel CMOS
Effective Pixel	2592(H)×1944(V)
Video Frame Rate	NTSC:5MP:20FPS/ 4MP:30FPS, 15FPS PAL:5MP:12.5FPS/ 4MP:25FPS,12.5FPS
Electronic Shutter	PAL:1/50s~1/300,000s NTSC:1/60s~1/300,000s
Min.Illumination	Color:0.1lux.BW:0.5lux.Color.DSS:0.017lux.BW DSS:0.0008lux
OSD	Yes
Synchronization	Internal
TV system	PAL / NTSC
Lens	
Lens	2.8~12mm(DC lens)
General	
Power Supply	DC12V
Power Consumption	660mA
Working Temperature	-10°C~+45°C



Packing Information

Unit G.W.	0.74KG
Dimensions	120mm*86mm
Package/CTN	24PCS/CTN
CTN G.W.	21KG
Meas.	661*337*385mm

HDC-DI3A02/5M-2812-B (W)

5.0 Megapixel 1944P HD 4 In 1 Cameras

Dimensions (mm)

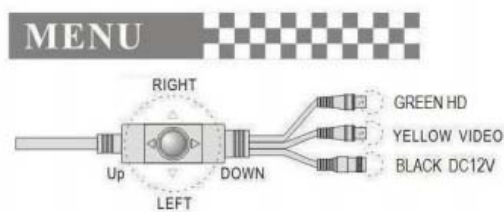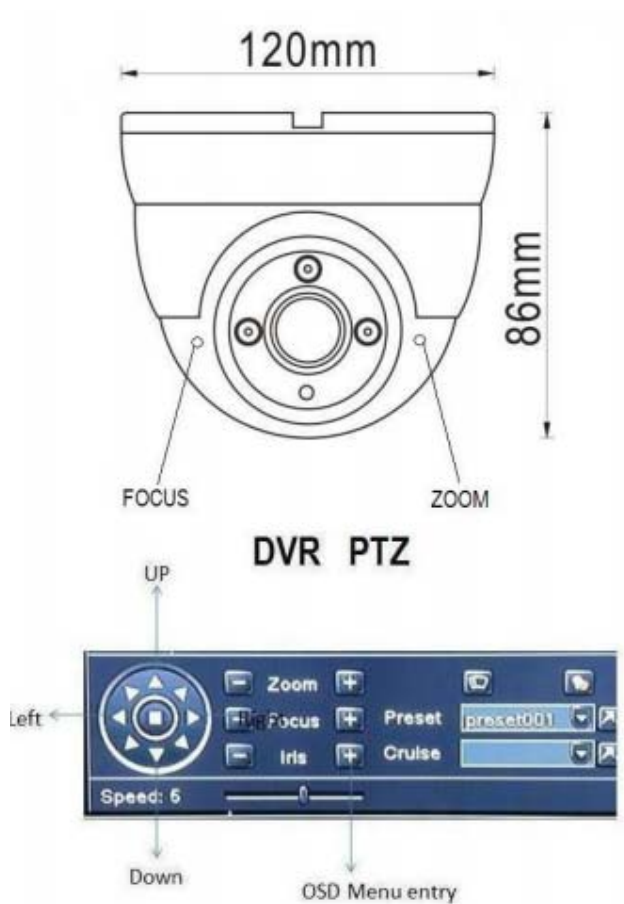

- 1.The factory default output TVI.
- 2.Long press the confirmation key switching TVI AHD CVI.