




W-POE/EX01A



Features

W-Poe/EX01A can be installed at a greater distance than 100m (328 ft.) from one another by connecting W-Poe/EX01A for every extra 100m (328 ft.) of cable, both Ethernet and Poe can be extended to 200 m (656 ft.), 300 m (984 ft.) or even greater distances; depending on camera model and power source. W-Poe/EX01A does not require any additional power supply and the connected network camera is fed by a single Poe switch or midspan which simplifies installation. W-Poe/EX01A offers two ethernet ports, which are both configured automaticall for linksped, duplex and crossover and the full-rate network throughout is maintained.

Application:

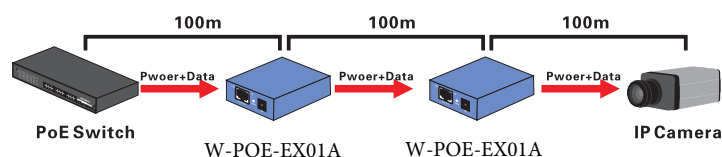

Feature

- ▶ Reduced Installation cost;
- ▶ More than 100 m (328 ft.) Ethernet and PoE connection;
- ▶ Fully IEEE802.3af/IEEE802.3at compliant;
- ▶ Lighting-proof and Compact design;
- ▶ Plug & Play. No configuration required;
- ▶ Support PoE power up to 15.4W;
- ▶ Full-rate network throughout the whole extended distance.

Technical Specification:

Model	LS101
Compliance	IEEE 802.3af, IEEE 802.3at, Support PoE power up to 15.4W
Processing types	Store-and-forward Half-duplex back pressure; IEEE802.3x full- duplex flow control .
Data Rate	10/100Mbps
Pin Definition	12/36 for power/45/78 for data
PoE Power Input	48V
PoE Power Output	48V
Network Standards	IEEE802.3i 10BASE-T ; IEEE802.3u 100BASE-TX IEEE802.3x Flow Control; IEEE 802.3af, IEEE 802.3at Power over Ethernet
LED Display	YES
Operating Tem.	-10 °C to 50 °C
Storage Tem.	-20-70°C
Operating Humidity	90% max relative humidity,non-condensing
Storage Humidity	90% max relative humidity,non-condensing
Certification	CE,FCC,RoHs
Warranty	1 year

GSS East (NY Branch)
59-43 Fresh Meadow Lane
Fresh Meadows, NY 11365
718-767-0099

GSS West (CA Branch)
15222 Stafford St
City of Industry, CA 91744
323-234-2835

*Design and specifications are subject to change without notice.