


WNC2016-EV 2.8MM



6MP Elevator IP Camera

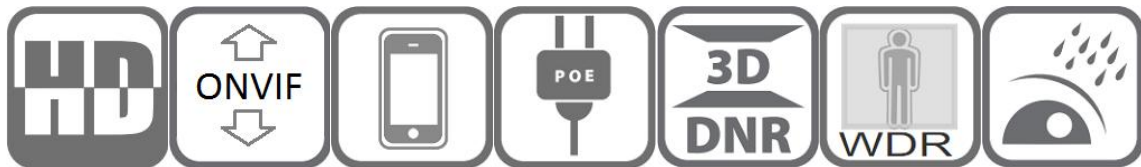

Features:

- 1/2.8" Sony CMOS sensor
- 6MP realtime resolution 3072x2048
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR,Mirror, rotate, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and ONVIF 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 1pc IR Leds, IR distance 5-6 meters
- HD 2.8mm fixed lens
- Human body detection, Vehicle detection

WNC2016-EV 2.8MM



6MP Elevator IP Camera

Technical Specifications:

Model	WNC2016-EV 2.8mm
Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	6 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Other	AGC,Motion Detection,Privacy Mask,Flip ,OSD overlay
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 25fps@6MP(3072x2048)/25fps@5MP(2592x1944)/4MP(2592x1520)/3MP , 30fps@1080P/720P Sub stream: 25fps@D1/VGA/360P/CIF, etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Built-in Mic	No
OSD Overlay	Title and Time overlay
IR Led	
IR Led	1 pc IR Led
IR Distance	5-6M
Lens	
Focal length	2.8mm fixed lens
Optional Function	
PoE, Human body detection, Vehicle detection	
Network Services	
Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox (32bit esr), etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC $\pm$ 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH