



PRODUCT CATALOG

Q4 2024



Deep Learning Analytics Premium Selections

DeepInMind Intelligence High Quality Surveillance Products

Recommended
APPS

EZ View



NDA

Pg.3 - Pg.4

Recommended
APPS

Guarding Vision



RED|LINE

Pg.5 - Pg.30

Recommended
APPS

DMSS



BLUE|LINE

Pg.31- Pg.46

INTERCOM
ACCESS CONTROL

Dsnake Smart Pro



**INTERCOME
ACCESS CONTROL**

Pg.47- Pg.52



GREEN|LINE

Pg.53- Pg.55



GREY|LINE

Pg.56 - Pg.70

Index

NDAA	
NDAA NVRs	3
NDAA IP Cameras	4
RED LINE	
NVRs	5~8
Specialized Network Cameras	9~10
Licence Plate Camera (LPR)	11
Color Day & Night Network Camera	12
Network Camera	13~18
360° Fish-eye Network Camera	19
Network PTZ	20~22
AI TVI Recorders	23~25
Coax Cameras	26~29
Coax PTZ	30
BLUE LINE	
NVRs	31~33
SMD+ 2.0 Network Cameras	34
IP Cameras	35~38
360° Fish-eye Network Camera	39
Network PTZ	40
AI XVR	41~42
Coax CVI Cameras	43~45
4 in 1 PTZ	46
INTERCOM / ACCESS CONTROL	
Blue line INTERCOM	47-48
Rosslare / Red line Access Control	49-50
Dnake Intercom	50~51
Accessories	52
GREEN LINE	
4 in 1 Coax Cameras	53~54
Network Cameras	54~55
GREY LINE	
Brackets & Housings	56
Wireless Access Point	57
PoE Switches	58
Power Supplies	59~60
Cables	61~62
Accessories	63~69
TV Mount Brackets	70

Icon Glossary

	H.265 Compression		2 Way Audio		8K Ultra HD Support		2MP Camera Support
	Built-in Microphone		Fish-eye Lens		4K Ultra HD Support		4MP Camera Support
	MicroSD Card Supported		Ai G2 Human & Vehicle Detection		Ai Support		5MP Camera Support
	True WDR Supported		Vandal Proof		4 in 1 Video Format Support		6MP Camera Support
	Face Capture Face Recognition		Active Deterrence		45x PTZ Max Zoom		8MP Camera Support
	People Counting		180° Panoramic Lens		32x PTZ Max Zoom		12MP Camera Support
	Wi-Fi Supported		Auto Tracking		25x PTZ Max Zoom		Dual Voltage
	Starlight Supported		SMD+ Human & Vehicle Detection		15x PTZ Max Zoom		Smart Hybrid Light
	Color Day & Night Supported		Motorized Lens		Dual Illuminator		Lightning Protection



Scan for more NDAA products

NDAA UNV Network Recorders

Recommended APPS



MODEL NUMBER	NVR301-04LX-P4	NVR301-04B-P4-IQ	NVR501-08B-P8	NVR301-08B-P8-IQ
Video Input	4CH	4CH	8CH	8CH
Video Output	HDMI/VGA/CVBS	4K HDMI/VGA	HDMI/VGA/CVBS	4K HDMI/VGA
Multiplex Option	Recording, Playback, Backup, Live & Remote Access			
Recording Resolution	Up to 8 MegaPixels	Up to 12 MegaPixels	Up to 8 MegaPixels	Up to 12 MegaPixels
Synchronous Playback 4/8/16	Capability: 2 x 4k@30, 3 x 5MP@30	Smart On 2 x 4K@30, 4 x 4MP@30	Capability: 4 x 4k@30, 6 x 5MP@30	Smart On 2 x 4K@30, 4 x 4MP@30
Audio In/Out	1/1			
Alarm In/Out	N/A			
Built-in PoE	4CH Maximum output 54W	4CH Maximum output 50W	8CH Maximum output 75W	
Network	1 RJ-45 10 /100 /1000 Mbps			
Storage	1 SATA (Up To 8TB HDD)	1 SATA (Up To 10TB HDD)	1 SATA (Up To 8TB HDD)	1 SATA (Up To 10TB HDD)
Incoming Bandwidth	80 Mbps	80 Mbps	80 Mbps	80 Mbps
Outgoing Bandwidth	64 Mbps	80 Mbps	64 Mbps	80 Mbps
Decoding format	H.265/H.264/H.264+			
USB Connections	1 × USB 2.0 , 1 × USB 2.0			1 × USB 2.0 , 1 × USB 3.0
Dimensions	1U: 10.2" (W) × 9.4" (D) × 1.9" (H)			
Smart Features	VCA: Motion detection, Line crossing,Vehicle detection	VCA: Motion detection, Line crossing,Vehicle detection SIP, UMD	VCA: Motion detection, Line crossing,Vehicle detection	VCA: Motion detection, Line crossing,Vehicle detection SIP, UMD

Recommended APPS



MODEL NUMBER	NVR302-16B-P16-IQ	NVR502-32B-P16-IQ	NVR504-32B
Video Input	16CH	32CH	32CH
Video Output	4K HDMI/VGA (simultaneous output)	4K HDMI/VGA (independent output)	
Multiplex Option	Recording, Playback, Backup, Live & Remote Access		
Recording Resolution	12 Megapixels resolution recording		16 Megapixels resolution recording
Synchronous Playback 4/8/16	Smart Off: 2 x 12MP@30, 2 x 4K@30, Smart On: 2 x 4K@30, 4 x 4MP@30		Ultra 265/H.265: 2 x 16MP@30, 2 x 12MP@30
Audio In/Out	1/1		
Alarm In/Out	8/2		16/4
Built-in PoE	16CH Maximum output 240W	16CH Maximum output 240W	N/A
Network	1 RJ-45 10 /100 /1000 Mbps		2 RJ45 10M/100M/1000M
Storage	2 SATA (Up To 10TB HDD)	2 SATA (Up To 16TB HDD)	4 SATA (Up To 16TB HDD)
Incoming Bandwidth	160Mbps	Smart Off: 320Mbps Smart On:160Mbps	320Mbps
Outgoing Bandwidth	128Mbps	160Mbps	160Mbps
Decoding format	Ultra H.265/H.265/H.264		
USB Connections	1 × USB 2.0 , 1 × USB 3.0		2 × USB 2.0 , 1 × USB 3.0
Dimensions	1U: 15.0" (W) × 12.7" (D) × 2.1" (H)		1.5U: 17.3" (W) × 13.5" (D) × 1.9" (H)
Smart Features	VCA: Motion detection, Line crossing,Vehicle detection SIP, UMD		VCA: Motion, Line crossing, Vehicle detection

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

NDAA UNV IP Network Cameras

Recommended APPS



New Item



New Item



MODEL NUMBER	EC-T4F28M-V3	IPC3614SR3-ADF28KM-G	IPC3624SR-ADF28KM-WP	IPC2314SR-ADF28KM-WP
Price				
Featuring	4MP H.265	4MP H.265 True WDR uTalk Starlight AI	4MP H.265 True WDR Color Day & Night AI	4MP H.265 True WDR Color Day & Night AI
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.8" CMOS sensor	1/1.8" CMOS sensor
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	D-WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	White Light, up to 30m (98ft) warm light distance	White Light, up to 30m (98ft) warm light
Lux	-	Colour: 0.003Lux (F1.6, AGC ON)	Colour: 0.0003 lux (F1.0, AGC ON)	Colour: 0.0003 lux (F1.0, AGC ON)
Video Compression	H.265 /H.264	H.265 /H.264	Ultra 265 / H.265 /H.264	Ultra 265 / H.265 /H.264
Max. Resolution & Frame Rate	4MP 2688 × 1520@20fps	4MP 2688 x1520@30fps	4MP 2688 x1520@25fps	4MP 2688 x1520@25fps
Audio In/Out	-	Built in Mic	Built in Mic	Built in Mic
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot Max up to 128GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories	TR-JB03-H-IN Junction Box	TR-JB03-G-IN Junction Box		

Recommended APPS



New Item



MODEL NUMBER	IPC3615LB-AF28K-DL	IPC3618SR3-ADF28KM-G	IPC3618SB-ADF28KMC-I0	IPC2128SB-ADF28KMC-I0
Price				
Featuring	5MP H.265 True WDR Color Day & Night AI uTalk uTalk	8MP H.265 True WDR uTalk Starlight AI	8MP H.265 True WDR uTalk AI	8MP H.265 True WDR uTalk AI
Image Sensor	1/3.0" CMOS	1/2.7" Progressive Scan CMOS	1/2.8" CMOS sensor	1/2.7" CMOS Sensor
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	D-WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR up to 30m(98ft), Warm light up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	Colour: 0.01 lux (F1.6, AGC ON)	Colour: 0.005Lux (F1.6, AGC ON)	Colour: 0.0025Lux (F1.6, AGC ON)	Colour: 0.0025Lux (F1.6, AGC ON)
Video Compression	Ultra 265 /H.265 /H.264	H.265 /H.264	H.265 /H.264	H.265 /H.264
Max. Resolution & Frame Rate	5MP 2880 × 1620@20fps	8MP 3840 × 2160@20fps	8MP 3840 × 2160@20fps	8MP 3840 × 2160@20fps
Audio In/Out	Built in Mic	Built in Mic	Built in Mic / Built-in Speaker	Built in Mic / Built-in Speaker
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot Max up to 128GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories	TR-JB03-H-IN Junction Box	TR-JB03-I-IN Junction Box	TR-JB03-G-IN Junction Box	



Plug & Play



Remote Access



Ultra High Quality

H.265

RED|LINE
MAKES IT EASY TO CONNECT.
ENROLLING CAMERAS IN AN INSTANT!



Apple



Windows



Linux



Android



Iphone

IP Network Recorders with PoE

Recommended APPS



Guarding Vision



New Item



New Item



New Item

MODEL NUMBER	NR21P4-4D	NR21P8-8/D	NR21P6-16/D
Video Input	4CH	8CH	16CH
Video Output	HDMI/VGA/CVBS		
Multiplex Option	Recording, Playback, Backup, Live & Remote Access		
Recording Resolution	Up to 8 MegaPixels		
Synchronous Playback	4CH	8CH	16CH
Audio In/Out	1/1		
Alarm In/Out	N/A	4/1	
Built-in PoE	4CH Maximum output 50W	8CH Maximum output 80W	16CH Maximum output 150W
Network	1 RJ-45 10 /100 /1000 Mbps		
Storage	1 SATA (Up To 8TB HDD)	2 SATA (Up To 8TB HDD/ea)	
Incoming Bandwidth	40 Mbps	80 Mbps	160 Mbps
Outgoing Bandwidth	80 Mbps	80 Mbps	
Decoding format	H.265/H.264/H.264+		
USB Connections	1 × USB 2.0 , 1 × USB 2.0	1 × USB 2.0 , 1 × USB 3.0	
Dimensions	1U: 12.4" (W) × 9.4" (D) × 1.9" (H)	1.5U: 15.2"(W) × 12.4"(D) × 2.0"(H)	
VCA	1ch Motion 2.0, Line crossing, Intrusion	4-ch Motion Detection 2.0 , Line crossing, Intrusion Detection	

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

IP Network Recorders with PoE

Recommended APPS



Guarding Vision



MODEL NUMBER	NR33P8-8/D	NR33P6-16/D	NR52P6-16
Video Input	8CH	16CH	16CH
Video Output	HDMI/VGA/CVBS		8k 1 HDMI/ 1 4K HDMI / 1 VGA/ 1 CVBS
Multiplex Option	Recording, Playback, Backup, Live & Remote Access		
Recording Resolution	Up to 8 MegaPixels		Up to 12 MegaPixels
Synchronous Playback	8CH	16CH	16CH
Audio In/Out	1/1		
Alarm In/Out	N/A		16/4
Built-in PoE	8CH Maximum output 120W	16CH Maximum output 120W	16CH Maximum output 210W
Network	1 RJ-45 10 /100 /1000 Mbps		
Storage	2 SATA (Up To 10TB HDD/ea)		4 SATA (Up To 14TB HDD/ea) 1 eSATA
Incoming Bandwidth	80 Mbps	160 Mbps	320 Mbps
Outgoing Bandwidth	120 Mbps	160 Mbps	400 Mbps
Decoding format	H.265/H.264/H.264+		
USB Connections	1 × USB 2.0 , 1 × USB 3.0		2x USB 2.0, 1x USB 3.0
Dimensions	1.5U: 15.2"(W) × 12.4"(D) × 2.0"(H)		1.5U: 17.5"(W) × 15.7"(D) × 2.8"(H)
VCA	1ch Facial Recognition, Motion, Line crossing,	4ch Facial Recognition, Motion, Line crossing, Intrusion	Detection (motion, line crossing, intrusion)


IP Network Recorders with PoE

IP Network Recorders

Recommended APPS



Guarding Vision



New Item



MODEL NUMBER	NR52P6-32	NR52P24-32	NR520-32
Video Input	32CH	32CH	32CH
Video Output	8k 1 HDMI/ 1 4K HDMI / 1 VGA/ 1 CVBS		2HDMI/ 1VGA/ 1 CVBS
Multiplex Option	Recording, Playback, Backup, Live & Remote Access		
Recording Resolution	Up to 12 MegaPixels	Up to 32 Mega Pixels	Up to 12 MegaPixels
Synchronous Playback	16CH		
Audio In/Out	1/1		
Alarm In/Out	16/4	16/9	16/4
Built-in PoE	16CH Maximum output 210W	24CH Maximum output 210W	N/A
Network	1 self-adaptive 10M/100M/1000M network interface		
Storage	4 SATA /1 eSATA (Up To 14TB HDD)		4 SATA /1 eSATA (Up To 8TB HDD)
Incoming Bandwidth	320Mbps		256Mbps
Outgoing Bandwidth	400Mbps		256Mbps
Decoding Format	H.265+/H.265/H.264+/ H.264		
USB Connections	2x USB 2.0 , 1x USB 3.0		
Dimensions	1.5U: 17.5"(W) × 15.7"(D) × 2.8"(H)		1.5U: 17.3"(W) × 15.3"(D) × 2.7"(H)
VCA	Detection (motion, line crossing, intrusion, heat map, ANPR, and people counting)		

WD Purple™

Western Digital Purple Surveillance Drive

WD Purple drives have an enhanced workload rating that supports systems designed for 24x7 video recording with up to 64 cameras. WD Purple 8TB, 10TB, 12TB, and 14TB capacities feature AllFrame AI technology that enables an additional 32 streams for Deep Learning analytics within the system.

High Capacity

Up to 14TB for the needs of 24/7, always on high definition surveillance systems

Enhanced Workload Ratings

Up to 180TB/year on capacities up to 6TB, and up to 360TB/year on 8TB and above

Exclusive AllFrame Technology:

Help reduce frame loss, improve overall video playback, and increase the numbers of days supported within a NVR

WD Authorized Dealer



Seagate SkyHawk Surveillance Drive

- Smart. Safe. Secure
- Surveillance-Optimized Storage
- Engineered for 24x7 Video Recording
- 3x The Workload Rating Of Desktop Drives
- Supports Up To 64 HD Cameras
- Stores Up To 10,000 Hours Of Digital Video On Capacities Up To 10TB



LEARN MORE AT SEAGATE.COM

Call for
Price!

Seagate Authorized Dealer

SEAGATE

IP Network Recorders (Supports RAID)

Recommended APPS



Guarding Vision




MODEL NUMBER	NRA20-32	NRA20-64
Video Input	32CH	64CH
Video Output	(1) 8K HDMI/ (1) 4K HDMI/2 VGA	(1) 8K HDMI/ (1) 4K HDMI/2 VGA
Multiplex Option	Recording, Playback, Backup, Live & Remote Access	
Recording Resolution	Up to 12 MegaPixels	
Synchronous Playback	16CH	
Audio In/Out	1/2	
Alarm In/Out	16/4	
Built-in PoE	N/A	
Network	2 RJ-45 10 /100 /1000 Mbps	
Storage	HOT Swap 8 SATA (up to 16TB)(RAID 0,1,5,6,10) and 1 eSATA	
Incoming Bandwidth	320 Mbps, or 200 Mbps (when RAID is enabled)	400 Mbps, or 200 Mbps (when RAID is enabled)
Outgoing Bandwidth	400 Mbps, or 200 Mbps (when RAID is enabled)	400 Mbps, or 200 Mbps (when RAID is enabled)
Decoding F ormat	H.265/H.264/H.264+	
USB Connections	2×USB 2.0 , 1×USB 3.0	
Dimensions	3U: (17.5"(W) × 18.3"(D) × 3.7"(H)	
VCA	Detection (motion, line crossing, intrusion, heat map, ANPR, and people counting, Supports POS Function	

IP Network Recorders (Supports RAID)

Recommended APPS



Guarding Vision



MODEL NUMBER	NRT10-128/I16	NRT10-256/I16	NRT10-256/I24
Video Input	128CH	256CH	256CH
Video Output / Input	2 HDMI / 1VGA	2 HDMI / 1VGA	
Multiplex Option	Recording, Playback, Backup, Live & Remote Access		
Recording Resolution	Up to 12 MegaPixels		
Synchronous Playback	16CH		
Audio In/Out	1/2		
Alarm In/Out	16/4	16/4	16/8
Built-in PoE	N/A		
Network	2 RJ-45 10 /100 /1000 Mbps		
Storage	HOT Swap 16 SATA (Up To 8TB HDD)	HOT Swap 16 SATA (RAID0, RAID1, RAID5, RAID6, RAID10) and 1 eSATA (Up To 8TB HDD)	HOT Swap 24 SATA (RAID0, RAID1, RAID5, RAID6, RAID10) and 1 eSATA (Up To 8TB HDD)
Incoming Bandwidth	768 Mbps, or 512 Mbps (when RAID is enabled)		
Outgoing Bandwidth	768 Mbps, or 512 Mbps (when RAID is enabled)		
Decoding F ormat	H.265+/H.265/H.264/H.264+		
USB Connections	2×USB 2.0 , 1×USB 3.0	2×USB 2.0 , 1×USB 3.0	2×USB 2.0 , 1×USB 3.0
Dimensions	3U: (17.5"(W) × 19.5"(D) × 5.7"(H)		
VCA	Detection (motion, line crossing, intrusion, heat map, ANPR, and people counting		

DeepinMind Series NVR

Recommended APPS

Guarding
Vision

MODEL NUMBER	iNRA10-32/S
DeepinMind Features	False alarm filtering for up to 16-ch behavior
Video Input	32CH
Video Output	2HDMI/2VGA/ CVBS
Recording Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p
Synchronous Playback	16CH
Audio In/Out	2-ch, RCA (Linear, 1 KΩ)
Alarm In/Out	16/4
CVBS output	Support
Network	2 × RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Storage	8 SATA (Up To 8TB each HDD) Support: (RAID0, RAID1, RAID5, RAID6, RAID10), 1 eSATA interface
Decoding format	H.265+/H.265/H.264+/H.264
USB connections	2 × USB 2.0; Rear panel: 1 × USB 3.0
VCA detection	Human body detection, face detection, vehicle detection, line crossing detection, intrusion detection, region entrance detection, region exiting... detection
Dimensions	17.5" × 18.5" × 3.5"

Specialized Network Cameras



MODEL NUMBER	NCA01-PC	INCA812-DFR 4MM
Price		
Featuring		
Image Sensor	1/3" Progressive Scan CMOS	2 x 1/2.8" progressive scan CMOS
Lens	2.8 mm Fixed lens	2 X 4 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR
Max. IR Distance	-	IR range up to 10m (30ft)
Video Compression	H.264	H.265 /H.264
Max. Resolution & Frame Rate	640 x 960	2MP 1920 × 1080 @ 30 fps
Audio In/Out	-	1 In/ 1 Out
Protection	IP67	IP67
Memory Slot	-	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	36 VDC , max. 27 W, 0.75A

AI Face Capture Cameras



MODEL NUMBER	NC712-IDZ	NC714-IDZ	NC718-IDZ
Price			
Featuring			
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
Lens	2.8 to 12 mm Varifocal Lens with Smart focus	2.8 to 12 mm Varifocal Lens with Smart focus	2.8 to 12 mm Varifocal Lens with Smart focus
Wide Dynamic Range	140dB WDR	140dB WDR	140dB WDR
Lux	Ultra-low light, 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR	Ultra-low light, 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR	Ultra-low light, 0.002 Lux @ (F1.2, AGC ON), 0 Lux with IR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	2 MP 1920 × 1080 @ 60 fps	4MP 2560 x 1440 @ 30 fps	8MP 3840 x 2160 @ 30 fps
Audio In/Out	1 In/ 1 Out	1 In/ 1 Out	1 In/ 1 Out
Protection	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE

Specialized Network Cameras



MODEL NUMBER	NC322-PH 3.7MM	NC324-CU 2.8 MM	NC326-CU 2.8MM
Price			
Featuring			
Image Sensor	1/27" Progressive Scan CMOS	1/3" Progressive Scan CMOS	2 x 1/2.8" progressive scan CMOS
Lens	3.7 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	D-WDR	120dB WDR	120dB WDR
Max. IR Distance	-	IR range up to 10m (30ft)	IR range up to 10m (30ft)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	2MP 1920 × 1080 @ 30 fps	4MP 2688 × 1520 @ 30 fps	6MP 3072 x 2048 @ 30 fps
Audio In/Out	-	Built-in Mic & Speaker	Built-in Mic & Speaker
Special Feature	-	Built-in Wi-Fi 2.4Ghz	Built-in Wi-Fi 2.4Ghz
Protection	IP67	IP67	IP67
Memory Slot	-	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V	DC 12V, PoE	DC 12V, PoE

LPR Bullet CAMERAS

KEY FEATURES:

- Ultra-low light, 0.005 Lux @ (F1.2, AGC ON), 0.0027 Lux @ (F1.4, AGC ON), 0 Lux with IR
- IR Range: Up to 100m (328ft)
- Audio/Alarm IO
- Support ANR
- Built-in micro SD Slot. Max up to 128GB
- J-box is included



NC522-VBA32-LPR

- 2 MP Low Light Smart Bullet LPR Camera
- 1/2.8" Progressive Scan CMOS
- 1920 × 1080
- 8 ~ 32 mm, AF automatic focusing and motorized zoom lens
- Built-in Heater
- Slow shutter
- 140dB WDR
- IP67

NC524-VBA32-LPR

New Item

- 4 MP Low Light Smart Bullet LPR Camera
- 1/1.8" Progressive Scan CMOS
- 2688 × 1520
- 8 ~ 32 mm, AF automatic focusing and motorized zoom lens
- Built-in Heater
- Slow shutter
- 140dB WDR
- IP67



1476ZJ-SUS

Corner Mount



1475ZJ-SUS

Pole Mount



License Plate Recognition Camera-Installation Manual

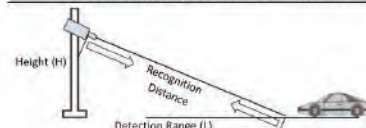


Figure 2-2 Recognition Distance

2: Select a proper lens according to the table below. The recognition distance is based on the camera's focal length.

Table 2-1 Lens and Recognition Distance Table

Camera	Lens (mm)	Min. Recognition Distance (m)	Max. Recognition Distance (m)	Scene
LPR Camera	2.8-12	6	18	Entrance
	8-32	15	50	Road Traffic

2.3 Installation Angle

The installation angle must meet the requirements below:

- Vertical angle should not exceed 30 degrees.
- Horizontal angle should not exceed 30 degrees.

HAVE YOUR OWN BRAND

GSS OFFERS PRIVATE LABELING:

- You can have your company logo placed on many of our high quality products!
- We also offer non-branded products.
- Call today and find out more about this exclusive service.



GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

Color Day & Night AI Network Cameras



MODEL NUMBER	NC454G2E-TD/LIU 2.8	NC354G2-XDAU/SL 2.8MM	NC454G2E-XD/LU 2.8 MM	NC454-XD/LU-G2 4 MM
Price				
Featuring				
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 /4 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR, White Light up to 40m (131fts)	IR range up to 30m (98ft) Strobe Light	LED warm light range up to 30m (98ft)	LED warm light range up to 30m (98ft)
Lux	Color: 0.001 Lux @ (F1.0, AGC ON)	Color: 0.003 Lux @ (F1.4, AGC ON)	Color: 0.0014 Lux @ (F1.0, AGC ON)	Color: 0.0014 Lux @ (F1.0, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	4MP 2688 × 1520@30fps	4MP 2688 × 1520@30fps	4MP 2688 × 1520@30fps	4MP 2688 × 1520@30fps
Audio In/Out	Built-in Mic	Built-in Mic & Speaker (Audible Warning)	Built-in Mic	Built-in Mic
Protection	IP67, IK10	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 512GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories				

Color Day & Night AI Network Cameras



MODEL NUMBER	NC458G2E-XD/LIU 2.8MM	NC458G2-XD/LIU-SR 2.8MM	NC454-XB/L 2.8 MM	NC458G2-PDL/LU
Price				
Featuring				
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	2 x 1/1.8" progressive scan CMOS
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	3.6 m to ∞
Wide Dynamic Range	130dB WDR	130dB WDR	120dB WDR	130dB WDR
Max. IR Distance	LED warm light range up to 30m	IR range up to 30m (98ft) Strobe Light	LED warm light range up to 30m (98ft)	IR range up to 30m (98ft) Strobe Light
Lux	Color: 0.008 Lux @ (F1.0, AGC ON)	Color: 0.0008 Lux @ (F1.0, AGC ON)	Color: 0.0014 Lux @ (F1.0, AGC ON)	Color: 0.005 Lux @ (F1.0, AGC ON)
Video Compression	H.265/H.264	H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	8MP 3840 × 2160 @20fps	8MP 3840 × 2160 @20fps	4MP 2688 × 1520@30fps	8MP 5120 × 1440 @20fps
Audio In/Out	Built-in Mic	Built-in Mic & Speaker (Audible Warning)	-	Built-in Mic & Speaker (Audible Warning)
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 512GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories				

Turret Network Cameras



New Item



New Item



MODEL NUMBER	NC224-XDU 2.8MM	NC224G2-XD/LU 2.8MM	NC228-XDU 2.8 MM	NC228G2-XD-LUJ 2.8 MM			
Price							
Featuring	4MP H.265 	4MP H.265     	8MP H.265 	8MP H.265     			
Image Sensor	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS			
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens			
Wide Dynamic Range	D WDR	120dB WDR	120dB WDR	120dB WDR			
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft) <i>Supplement Light Range</i> White Light : Up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft) <i>Supplement Light Range</i> White Light : Up to 30m (98ft)			
Lux	-	Color: 0.005 Lux @ (F1.6, AGC ON)	-	Color: 0.01 Lux @ (F2.0, AGC ON)			
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264			
Max. Resolution & Frame Rate	4MP 2560 × 1440 @20fps	4MP 2560 × 1440@20fps	8MP 3840 × 2160@30fps	8MP 3840 × 2160@30fps			
Audio In/Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic			
Protection	IP67	IP67	IP67	IP67			
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to	Built-in micro SD Slot. Max up to 256GB			
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE			
Accessories	 B1-XD-W Junction Box	 1273ZJ-130-TRL Wall Mount	 1273ZJ-130B-TRL Wall Mount	 1280ZJ-M Junction Box	 1275ZJ Pole Mount	 1276ZJ Corner Mount	 1271ZJ-130-TRL Pendant Mount

Turret Network Cameras



New Item



New Item



MODEL NUMBER	NC324G2-XD(G) 2.8 / 4	NC326-XD(G) 2.8 / 4MM	NC326G2-XDU 2.8 MM	NC328G2-XD(G) 2.8 / 4MM			
Price							
Featuring	4MP H.265 True WDR Starlight AI V2 Home-View Detection micro SD AI Harmon-Voice Detection	6MP H.265 True WDR AI V2 Home-View Detection micro SD	6MP H.265 True WDR UCC-SPRING Starlight AI V2 Home-View Detection micro SD AI Harmon-Voice Detection	8MP H.265 True WDR Starlight AI V2 Home-View Detection micro SD AI Harmon-Voice Detection			
Image Sensor	1/3" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS			
Lens	2.8 / 4 mm Fixed lens	2.8 / 4 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens			
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR			
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)			
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)			
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264			
Max. Resolution & Frame Rate	4MP 2688 × 1520 @30fps	6MP 3072 × 2048@20 fps	6MP 3072 × 2048@20 fps	8MP 3840 × 2160 @20fps			
Audio In/Out	-	-	Built-in Mic	-			
Protection	IP67	IP67	IP67	IP67			
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB			
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE			
Accessories	 B1-XD-W(G) Junction Box	 1273ZJ-130-TRL(G) Wall Mount	 1273ZJ-130B-TRL Wall Mount	 1280ZJ-M Junction Box	 1275ZJ Pole Mount	 1276ZJ Corner Mount	 1271ZJ-130(B)-TRL Pendant Mount

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

Turret Network Cameras

Motorized Turret Network Cameras

New Item

Junction Box
(Included)Junction Box
(Included)

MODEL NUMBER	NC328G2-XDU 2.8 MM	NC224-XDZ	NC326-XDZ	NC328-XDZ
Price				
Featuring				
Image Sensor	1/2.5" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS
Lens	2.8 mm Fixed lens	2.8 ~12 mm Motorized lens	2.8 ~12 mm Motorized lens	2.8 ~12 mm Motorized lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	-	-
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	8MP 3840 × 2160 @20fps	4MP 2560 × 1440 @ 20 fps	6MP 3072 × 2048 @20fps	8MP 3840 × 2160 @20fps
Audio In/Out	Built-in Mic	-	1 In/ 1 Out	1 In/ 1 Out
Protection	IP67	IP67	IP67 - IK10	IP67 - IK10
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories				

Mini Dome Network Cameras

New Item



New Item



MODEL NUMBER	NC324G2-WDA(G) 2.8 / 4 MM	NC324-WDC 2.8 MM	NC326G2-WDA 2.8 MM	NC326-WDC 2.8 MM
Price				
Featuring				
Image Sensor	1/3" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS
Lens	2.8 / 4 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	Color: 0.005 Lux @ (F1.6, AGC ON)	-
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	4MP 2688 × 1520@30fps	4MP 2688 × 1520@30fps	6MP 3072 × 2048@20fps	6MP 3072 × 2048@20fps
Audio In/Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic
Protection	IP67-IK10	IP67-IK10	IP67-IK10	IP67-IK10
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Wi-Fi	-	Yes	-	Yes
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories				

Mini Dome Network Cameras

Dome Network Cameras

New Item



MODEL NUMBER	NC328G2-WDA 2.8MM	NC322-TD 2.8MM	NC324-TDG 2.8 / 4 MM	NC324G2-TD 2.8 MM
Price				
Featuring				
Image Sensor	1/2.5" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 / 4 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	-	Color: 0.005 Lux @ (F1.6, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	8MP 3840 × 2160 @20fps	2MP 1920 × 1080 @ 30 fps	4MP 2688 × 1520@30fps	4MP 2688 × 1520@30fps
Audio In/Out	Built-in Mic	-	-	Audio In / Audio Out
Protection	IP67 - IK10	IP67 - IK10	IP67 - IK10	IP67 - IK10
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories				

Dome Network Cameras

New Item



New Item



MODEL NUMBER	NC326G2-TDA 2.8 MM	NC326-TD(G) 2.8 / 4 MM	NC328G2-TD(G) 2.8 / 4 MM	NC328G2-TDA 2.8 MM
Price				
Featuring				
Image Sensor	1/2.9" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Lens	2.8 mm Fixed lens	2.8 / 4 mm Fixed lens	2.8 / 4 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	6MP 3072 × 2048 @ 20 fps	6MP 3072 × 2048 @ 20 fps	8MP 3840 × 2160 @20fps	8MP 3840 × 2160 @20fps
Audio In/Out	1 In / 1 Out	-	-	1 In / 1 Out
Protection	IP67 - IK10	IP67 - IK10	IP67 - IK10	IP67 - IK10
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories				

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

Motorized Dome Network Cameras



Junction Box
(Included)



Junction Box
(Included)

MODEL NUMBER	NC224-VDZ	NC344-VDZ	NC326-VDZ
Price			
Featuring			
Image Sensor	1/3" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS
Lens	2.8 ~ 12 mm Motorized lens	2.8 ~ 12 mm Motorized lens	2.8 ~ 12 mm Motorized lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 40m (131ft)
Lux	-	Color: 0.007 Lux @ (F1.2, AGC ON)	-
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	4MP 2560 × 1440@30fps	4MP 2688 × 1520@30fps	6MP 3072 × 2048 @ 20 fps
Audio In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out
Protection	IP67 - IK10	IP67 - IK10	IP66 - IK10
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories			

Motorized Dome Network Cameras



Junction Box
(Included)

New
Item



Junction Box
(Included)

MODEL NUMBER	NC328-VDZ	NC358H2-VDZ
Price		
Featuring		
Image Sensor	1/2.5" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
Lens	2.8 ~ 12 mm Motorized lens	2.8 ~ 12 mm Motorized lens
Wide Dynamic Range	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 40m (131ft)
Lux	-	Color: 0.003 Lux @ (F1.2, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	8MP 3840 × 2160 @20fps	8MP 3840 × 2160 @25fps
Audio In/Out	1 In / 1 Out	1 In / 1 Out
Protection	IP67 - IK10	IP66 - IK10
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE
Accessories		



Mini Bullet Network Cameras



MODEL NUMBER	NC212-MB 2.8 MM	NC224-MB 2.8 MM	NC324G2-MB 2.8 MM	NC326-MB 4MM
Price				
Featuring	2MP H.265 SD	4MP H.265 AI Starlight Night Vision SD	4MP H.265 True WDR Starlight AI Night Vision SD	6MP H.265 True WDR SD
Image Sensor	1/2.7" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS
Lens	2.8 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens	4 mm Fixed lens
Wide Dynamic Range	D WDR	D WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 40m (131ft)	IR range up to 30m (98ft)
Lux	-	-	Color: 0.005 Lux @ (F1.6, AGC ON)	-
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	2MP 1920 × 1080@30fps	4MP 2560 × 1440@30fps	4MP 2688 × 1520@30fps	6MP 3072 × 2048@20fps
Audio In/Out	-	Built-in Mic	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories	 1280ZJ-XS Junction Box  1275ZJ Pole Mount  1276ZJ Corner Mount			

AI Mini Bullet Network Cameras

AI Bullet Network Cameras



MODEL NUMBER	NC328-MB 2.8 / 4MM	NC358H2-MB 2.8MM	NC324G2-XB 2.8 / 4 MM	NC354-XB2 2.8 MM
Price				
Featuring	8MP H.265 True WDR SD	8MP H.265 True WDR AI Starlight Night Vision SD	4MP H.265 True WDR Starlight AI Night Vision SD	4MP H.265 True WDR Starlight AI Night Vision SD
Image Sensor	1/2.5" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/3" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS
Lens	2.8 / 4mm Fixed lens	2.8 mm Fixed lens	2.8 / 4 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 40m (131ft)	IR range up to 40m (131ft)	IR range up to 30m (98ft)	IR range up to 80m (262ft)
Lux	-	Color: 0.003 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.003 Lux @ (F1.2, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	8MP 3840 × 2160 @20fps	8MP 3840 × 2160 @20fps	4MP 2560 × 1440@30fps	4MP 2560 × 1440@30fps
Audio In/Out	-	Built-in Mic	-	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories	 1280ZJ-XS Junction Box  1275ZJ Pole Mount  1276ZJ Corner Mount		 1260ZJ Junction Box  1275ZJ Pole Mount  1276ZJ Corner Mount	

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

Bullet Network Cameras



MODEL NUMBER	NC326-XB 2.8 / 4 MM	NC328-XB 2.8 / 4 MM
Price		
Featuring		
Image Sensor	1/2.9" Progressive Scan CMOS	1/2.5" Progressive Scan CMOS
Lens	2.8 / 4 mm Fixed lens	2.8 / 4 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	-	-
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	6MP 3072 × 2048 @20fps	8MP 3840 × 2160 @20fps
Audio In/Out	-	-
Protection	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB
Power	DC 12V, PoE	DC 12V, PoE
Accessories	1260ZJ Junction Box 1275ZJ Pole Mount 1276ZJ Corner Mount	

Motorized Bullet Network Cameras

Junction Box
(Included)Junction Box
(Included)

MODEL NUMBER	NC344-VBZ	NC326-VBZ	NC328G2-VBZ
Price			
Featuring			
Image Sensor	1/2.7" Progressive Scan CMOS	1/2.9" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Lens	2.8 ~ 12 mm Motorized lens	2.8 ~ 12 mm Motorized lens	2.8 ~ 12 mm Motorized lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 50m (168ft)	IR range up to 50m (168ft)	IR range up to 60m (196ft)
Lux	Color: 0.007 Lux @ (F1.2, AGC ON)	-	Color: 0.005 Lux @ (F1.2, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	4MP 2560 × 1440 @20fps	6MP 3072 × 2048 @20fps	8MP 3840 × 2160 @20fps
Audio In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out
Protection	IP67- IK10	IP67- IK10	IP67- IK10
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories	1475ZJ-SUS Pole Mount 1476ZJ-SUS Corner Mount		

360° Fisheye Network Cameras



MODEL NUMBER	NC325-FNA	NCA26-FEA	NCA2C-FEA
Price			
Featuring	    	       	      
Image Sensor	1/2.5" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.7" Progressive Scan CMOS
Lens	1.05 mm @ F2.2, horizontal field of view: 180°	1.27 mm Fixed lens	2 mm Fixed lens Panomorph lens RPL: B9VVT
FOV	360°(ceiling mount)	360°(ceiling mount)	360°(ceiling mount)
Wide Dynamic Range	120dB WDR	120dB WDR	D WDR
Dewrap	Multiple Dewrapping modes	Multiple Dewrapping modes	Multiple Dewrapping modes
Max. IR Distance	IR range up to 8m (26ft)	IR range up to 15m (49ft)	IR range up to 15m (49ft)
Lux	-	-	-
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	5MP 2560 × 1920 @30fps	6MP 3072 × 2048 @20fps	12MP 4000 × 3000 @20fps
Audio In/Out	1 In / 1 Out	Built-in Mic & Speaker	Built-in Mic & Speaker
Protection	IP67	IP67- IK8	IP67- IK10
Memory Slot	Built-in micro SD Slot. Max up to 128GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Accessories	 1294ZJ Wall Mount	 1280ZJ-M25(M1) Junction Box	 1273ZJ-M1 Wall Mount



NCA26-FEA

360° VIEW • H.265+ • MICRO SD CARD
• SUPPORT 18 DISPLAY MODES



Red|Line Network PTZ



AI PTZ Network Cameras



• Wall Mount included



• Wall Mount included

MODEL NUMBER	NP5C14A-IR/42X	NP5C18A-IR/42X	NP354-IR/SL 32X	NP358-IR/SL 25X
Price				
Featuring				
Image Sensor	1/1.8" Progressive Scan CMOS	1/1.2" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS	1/1.8" Progressive Scan CMOS
Lens	6.0 ~ 252 mm focal length	5.7 ~ 205.2 mm focal length	5.9 mm to 188.8 mm	5.9 ~ 147.5 mm focal length
Optical Zoom	42x optical zoom , 16x digital zoom	42x optical zoom , 16x digital zoom	32x optical zoom	25x optical zoom , 16x digital zoom
Wide Dynamic Range	140dB WDR	140dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 400m (1,312ft)	IR range up to 500m (1,640ft)	IR range up to 200m (656ft)	IR range up to 200m (656ft)
Lux	0.001 Lux @(F1.6, AGC ON)	0.001 Lux @(F1.6, AGC ON)	0.005 Lux @(F1.6, AGC ON)	0.005 Lux @(F1.6, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	4MP 2560 × 1440 @25fps	8MP 3840 × 2160 @25fps	4MP 2560 × 1440 @25fps	8MP 3840 × 2160 @25fps
Audio In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out, Built-In Mic & Speaker	1 In / 1 Out, Built-In Mic & Speaker
Alarm In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out
Pan	0° ~ 360° endles	0° ~ 360° endles	0° ~ 360° endles	0° ~ 360° endles
Tilt	-20° ~ 90°, auto flip	-20° ~ 90°, auto flip	-15° ~ 90°, auto flip	-15° ~ 90°, auto flip
Auto-Traking	Support	Support	Support	Support
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 24VAC, Hi-PoE	DC 24VAC, Hi-PoE	12VDC, PoE+	DC 24VAC, Hi-PoE
Intelligent Function	Auto-tracking, Licence Plate Detection, Face Detection & Comparison , Intrusion Detection, Line Crossing Detection	Auto-tracking, Licence Plate Detection, Face Detection & Comparison , Intrusion Detection, Line Crossing Detection	Intrusion Detection, PTZ Face Capture, Line Crossing Detection, Region Entrance/Exiting Detection	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection
Accessories	1603ZJ-P Wall Mount Bracket Call For price		1602ZJ-CORNER Corner Mount Bracket 1602ZJ-POLE Pole Mount Bracket 1660ZJ Speed Dome Parapet Wall Mount 1661ZJ Pendant Mount 8 in 1662ZJ "Pendant Mount 20" in Call For price	

PTZ Network Cameras



MODEL NUMBER	NPB124-IR/25X	NP224-IR/25X	NP322-IR/32X	NP312-IR/25X
Price				
Featuring				
Image Sensor	[Bullet channel]: 1/3" Progressive Scan CMOS; [PTZ channel]: 1/2.8" progressive scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Lens	[Bullet channel]: 2.8 mm; [PTZ channel]: 4.8 to 120 mm	4.8 ~ 120 mm focal length	4.8 ~ 153 mm focal length	4.3 ~ 94.0 mm focal length
Optical Zoom	[PTZ] 25x optical zoom	25x optical zoom , 16x digital zoom	32x optical zoom , 16x digital zoom	25x optical zoom , 16x digital zoom
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	[PTZ channel]: up to 100 m; [Bullet channel]: up to 30 m	IR range up to 150m (492ft)	IR range up to 200m (656ft)	IR range up to 150m (492ft)
Lux	[Bullet channel]: 0.0005 Lux @ (F1.0, AGC ON) [PTZ channel]: Color: 0.005 Lux @ (F1.6, AGC ON),	0.005 Lux @(F1.6, AGC ON)	0.005 Lux @(F1.6, AGC ON)	0.005 Lux @(F1.6, AGC ON)
Video Compression	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.264+/H.264
Max. Resolution & Frame Rate	4MP 2560 × 1440 @25fps	4MP 2560 × 1440 @25fps	2MP 1920 × 1080 @25fps	2MP 1920 × 1080 @30fps
Audio In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out
Alarm In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out Audio visual alarm: The white flashing light and audible	1 In / 1 Out
Pan	[PTZ] 0° ~ 360° endles	0° ~ 360° endles	0° ~ 360° endles	0° ~ 360° endles
Tilt	[PTZ]-15° ~ 90°, auto flip	-15° ~ 90°, auto flip	-15° ~ 90°, auto flip	-10° ~ 90°, auto flip
Auto-Traking	-	-	Support	-
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 24VAC, Hi-PoE	DC 24VAC, Hi-PoE	DC 24VAC, Hi-PoE	DC 24VAC, Hi-PoE
Intelligent Function	Intrusion Detection, PTZ Face Capture , Line Crossing Detection, Region Entrance/Exiting Detection	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection	Face Capture, Auto tracking , Intrusion Detection, Line Crossing Detection, Region	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection
Accessories				

REDLINE IP / TVI KEYBOARD PTZ

KB-1100KI

- PTZ/IP/DVR Keyboard Controller
- 7" TFT Touch Screen at 800×480 Res.
 - 4-axis joystick
 - Live view/playback of video on screen at up to 1080P resolution
 - Compatible with DVR/DVS, matrix, network camera/dome, PC-DVR, etc.
 - Macro command operation
 - Display of decoded video on monitor
 - Shortcut keys for dome control, setting and calling preset, patrol and pattern
 - Playback operation, input group & output group
 - Wiper and light control operation



Call for more information

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

PTZ Dome Network Cameras



• PoE Injector Included



• Wall Mount included
• PoE Adapter



MODEL NUMBER	NP312-OD/25X	NP112-IR/25X	NP1A12-IR/25X	NP1A24-IR/25X
Price				
Featuring	2MP	2MP	2MP	4MP
Image Sensor	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS	1/2.8" Progressive Scan CMOS
Lens	4.7 ~ 94 mm focal length	4.8 ~ 120 mm focal length	4.8 ~ 120 mm focal length	4.8 ~ 120 mm focal length
Optical Zoom	25x optical zoom, 16x digital zoom	25x optical zoom, 16x digital zoom	25x optical zoom, 16x digital zoom	25x optical zoom, 16x digital zoom
Wide Dynamic Range	D WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	-	IR range up to 100m (328ft)	IR range up to 50m (150ft)	IR range up to 150m (492ft)
Lux	-	0.005 Lux @(F1.6, AGC ON)	0.005 Lux @(F1.6, AGC ON)	0.005 Lux @(F1.6, AGC ON)
Video Compression	H.264+/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264	H.265+/H.265/H.264
Max. Resolution & Frame Rate	2MP 1920 × 1080 @30fps	2MP 1920 × 1080 @30fps	2MP 1920 × 1080 @30fps	4MP 2048 × 1536 @25fps
Audio In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out
Alarm In/Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out	1 In / 1 Out
Pan	0° ~ 360° endles	0° ~ 360° endles	0° ~ 360° endles	0° ~ 360° endles
Tilt	-5° ~ 90°, auto flip	-15° ~ 90°, auto flip	-5° ~ 90°, auto flip	-5° ~ 90°, auto flip
Auto-Traking	-	-	-	-
Protection	IP66	IP67	IP67 - IK10	IP67 - IK10
Memory Slot	Built-in micro SD Slot. Max up to 32GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB	Built-in micro SD Slot. Max up to 256GB
Power	DC 24VAC, Hi-PoE	DC 24VAC, Hi-PoE	12VDC & PoE	12VDC & PoE
Intelligent Function	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection	Intrusion Detection, Line Crossing Detection, Region Entrance/Exiting Detection
Accessories	1602ZJ-CORNER Corner Mount Bracket 1602ZJ-POLE Pole Mount Bracket 1661ZJ Pendant Mount 8 in 1662ZJ "Pendant Mount 20" in		1280ZJ-SD11 Junction Box 1605ZJ Wall Mount Bracket 1671ZJ-SD11 Ceiling Mount Bracket	

Indoor Mini PTZ Dome Cameras

NP112-ID	NP114-IR/4X	NP3A4-LS

- 2MP Ceiling PTZ Dome Network Cameral
- 1/2.8" Progressive Scan CMOS
- 1920x1080@30fps
- 4.7-94mm focal length
- Pan (360°), Til (5°~90°)auto flip
- 20x optical zoom,16x digital zoom

KEY FEATURES:

- IVS: Intrusion Detection, Line Crossing Detection
- Audio I/O / Alarm I/O
- Built-in micro SD Slot. Max up to 128GB
- IP66

- 4MP 4x Indoor IR Network Mini PTZ Camera
- 1/3" progressive scan CMOS
- 2560×1440@25fps
- 2.8 mm to 12 mm focal length
- Pan (330°), Til (0°~ 90°)auto flip
- 4x optical zoom, 16x digital zoom

KEY FEATURES:

- IVS Intrusion Detection, Line Crossing Detection, Face Detection
- Color: 0.005lux/F1.6, B/W: 0.001lux/F1.6
- IR Up to 20m (65ft)
- 120dB WDR
- Built-in Mic
- Audio I/O / Alarm I/O
- Built-in micro SD Slot. Max up to 256GB
- IK10



Power Supply Included

- 4MP 4mm Indoor White LED Network Mini PTZ Camera
- 1/1.8" progressive scan CMOS
- 2560×1440@25fps
- 4 mm
- Pan (350°), Til (0°~ 90°)auto flip
- 4x optical zoom, 16x digital zoom

KEY FEATURES:

- IVS Intrusion Detection, Line Crossing Detection, Face Detection
- Color: 0.0005lux/F1.6, B/W: 0.001lux/F1.6
- White light Up to 30m (98ft)
- 120dB WDR
- Built-in Mic & Speaker
- Audio I/O / Alarm I/O
- Face capture; up to 5 faces detected
- PoE

AI TVI Recorders

MD 2.0 Human & Vehicle



Human & Vehicle

Pro AI 5 IN 1 DVR

Recommended APPS



Guarding Vision



New Item



New Item



New Item

MODEL NUMBER	AR334-4/A	AR334-8/A	AR334-16/A
Video Output	HDMI/VGA 1080P/ CVBS		
BNC Video Input	4CH (HD-TVI/CVI/AHD/Analog/IP) up to 4MP	8CH (HD-TVI/CVI/AHD/Analog/IP) up to 4MP	16CH (HD-TVI/CVI/AHD/Analog/IP) up to 4MP
Analog Record Rate	4MP lite @15 fps, 1080p @30fps	4MP lite @15 fps, 1080p @30fps	4MP lite @15 fps, 1080p @30fps
IP Video Input	4 + 1 IP, (up to 6MP)	8+2 IP CH (up to 6MP)	16+2 IP CH (up to 6MP)
	Enhanced IP Mode On: 2CH(up to 6CH) up to 4MP, Up to 4MB/s per CH	Enhanced IP Mode On: 4CH (up to 12CH), up to 4MP, up to 4Mb/s per CH	Enhanced IP Mode On: 8CH (up to 24CH), up to 4MP, up to 4Mb/s per CH
Synchronous Playback	4CH	8CH	16CH
Audio In/Out	1CH/1CH, RCA		
Alarm In/Out	N/A		
Total Bandwidth	72 Mbps	96 Mbps	128MBPS
Network	1 RJ-45 10 /100 Mbps		1 RJ-45 10 /100 /1000 Mbps
Storage	1 SATA (Up To 10TB ea HDD)		2 SATA (Up To 10TB ea HDD)
Decoding format	H.265+/H.265/H.264+/H.264		
USB connections	2 × USB 2.0		1 × USB 2.0 , 1 × USB 3.0
Dimensions	12.4 × 9.5 × 1.8 inch	12.4 × 9.5 × 1.8 inch	15.0 × 12.6 × 1.9 inch
Video Intelligent Support	Ai 2.0 or 2CH Human /Vehicle Detection VCA	Ai 2.0 or 4CH Human /Vehicle Detection VCA	Ai 2.0 or 4CH Human /Vehicle Detection VCA

GSS NY - (718)767-0099
59-43 Fresh Meadow Ln.
Fresh Meadows, NY 11365

GSS LI, NY - (862)310-0400
789 Old Country Road,
Westbury, NY 11590

GSS CA - (323)234-2835
15222 Stafford St.
City of Industry, CA 91744

Enterprise 5 IN 1

Recommended APPS



Guarding Vision



H.265 32CH

Clearance



32CH



16CH

MODEL NUMBER	AR524-32	AR704-32	AR715-16
Video Output	HDMI/VGA up to 1080P/ HDMI 2 up to 4K/CVBS	2HDMI/VGA/CVBS	2HDMI/VGA/CVBS
BNC Video Input	32CH (HD-TVI/AHD/Analog/IP) Up to 6MP	32CH (HD-TVI/AHD/Analog/IP) Up to 2MP	16CH (HD-TVI/AHD/Analog/IP) Up to 2MP
Recording Resolution	4MP lite @15 fps, 1080p @30fps	720P@30, 1080p@12fps	3MP@15fps, 1080p@12fps
IP Video Input	32+16 IP CH (up to 6MP)	32+2 IP CH (up to 2MP)	16+2 IP CH (up to 8MP)
Synchronous Playback	16CH	32CH	16CH
Audio In/Out	4/1	16/1	16/1
Alarm In/Out	16 / 4	16/8	16/8
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
Network	1 RJ-45 10 /100 /1000 Mbps	2 RJ-45 10 /100 /1000 Mbps	2 RJ-45 10 /100 /1000 Mbps
Storage	4 SATA interfaces (Up To 10TB ea HDD)	8 SATA /1 eSATA (Up To 6TB ea HDD)	8 SATA /1 eSATA (Up To 6TB ea HDD) Support Raid
Decoding format	H.265+/H.265/H.264+/H.264	H.264 / H.264+	H.264 / H.264+
USB connections	3 × USB 2.0		
Dimensions	1.5U: 17.5"(W) × 15.3"(D) × 2.7"(H)	2U: 17.5"(W) × 18.5"(D) × 3.5"(H)	1.5U: 17.5"(W) × 18.5"(D) × 3.5"(H)
Video Intelligent	Smart motion : line crossing, intrusion detection		

Pro AI 4K 5 IN 1 DVR

Recommended APPS



Guarding Vision



New Item



New Item



New Item



MODEL NUMBER	AR336-4/A	AR336-8/A	AR336-16/A	AR326-8/E
Video Output	HDMI up to 2K (2560x1440)/VGA up to 1080p /CVBS	HDMI up to 4K (3840x2160)/VGA up to 1080p /CVBS	HDMI up to 4K (3840x2160)/VGA up to 1080p /CVBS	HDMI up to 4K (3840x2160)/VGA up to 1080p /CVBS
Video Input	4CH (HD-TVI/AHD/Analog/IP) Up to 8MP	8CH (HD-TVI/AHD/Analog/IP) Up to 8MP	16CH (HD-TVI/AHD/Analog/IP) Up to 8MP	8CH (HD-TVI/AHD/Analog/IP) Up to 8MP
Recording Resolution	1st CH up to 8MP @8fps, 5MP @12fps, 2MP @30fps	8MP @8fps, 5MP @12fps, 2MP @30fps	8MP @8fps, 5MP @12fps, 2MP @30fps	8MP @8fps, 5MP @12fps, 2MP @30fps
IP Video Input	4+2 IP CH, (4k/8mp on CH #1), 8MP	8+4 CH (up to 8MP)	16+8 IP CH (up to 8MP)	8+2 CH (up to 8MP)
	Enhanced IP Mode On: 4CH(up tp 8CH) up to 4MP, Up to 4MB/s per CH	Enhanced IP Mode On: 8CH(up tp 16CH) up to 4MP, Up to 4MB/s per CH	Enhanced IP Mode On: 16CH(up tp 32CH) up to 4MP, Up to 4MB/s per CH	N/A
Total Bandwidth	96Mbps	128Mbps	128Mbps	96Mbps
Synchronous Playback	4CH	8CH	16CH	8CH
Audio In/Out	1CH/1CH, RCA			
Alarm In/Out	N/A			
Network	1, RJ45 10M/100M self-adaptive Ethernet	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface		
Storage	1 SATA interfaces (Up To 10TB ea HDD)	2 SATA interfaces (Up To 10TB es HDD)		1 SATA interfaces (Up To 8TB ea HDD)
Decoding Format	H.265+/H.265/H.264+/H.264			
USB Connections	2×USB 2.0	1×USB 2.0 , 1×USB 3.0	1×USB 2.0 , 1×USB 3.0	2×USB 2.0
Dimensions	12.4 ×9.5 × 1.8 inch	15.0 × 12.6 × 1.9 inch	15.0 × 12.6 × 1.9 inch	12.4 ×9.5 × 1.8 inch
Video Intelligent	Ai 2.0 or 2CH Human /Vehicle Detection VCA	Ai 2.0 or 4CH Human /Vehicle Detection VCA	Ai 2.0 or 4CH Human /Vehicle Detection VCA	VCA

Enterprise 4K/8MP 5 IN 1 DVR

Recommended APPS  Guarding Vision	 	
	  	    
MODEL NUMBER	AR526-16	AR536-32
Video Output	HDMI/VGA up to 1080P/ HDMI 2 up to 4K/CVBS	
BNC Video Input	16CH (HD-TVI/AHD/Analog/IP) Up to 8MP	32CH (HD-TVI/AHD/Analog/IP) Up to 8MP
IP Video Input	16+16 IP CH (up to 8MP)	32+16 IP CH (up to 8MP)
	N/A	Enhanced IP Mode On: 32CH(up to 64CH) up to 4MP, Up to 4MB/s per CH
Recording Resolution	8MP @8fps, 5MP @12fps, 2MP @30fps	
Synchronous Playback	16CH	
	4/1	
Alarm In/Out	16/4	
CVBS output	Support	
Network	2 RJ-45 10 /100 /1000 Mbps	
Storage	4 SATA (Up To 10TB ea HDD), 1 eSATA Interface	
Decoding format	H.265+/H.265/H.264+/H.264	
USB connections	2 × USB 2.0 , 1 × USB 3.0	
Dimensions	440 × 390 × 70 mm (17.3 × 15.4 × 2.8 inch)	
Video Intelligent	VCA	Ai 2.0 or 4CH Human /Vehicle Detection VCA



Mini Turret Cameras



MODEL NUMBER	AC324F-MD/LA 2.8MM	AC344-MD 2.8 / 3.6 MM	AC326-MD 2.8 MM	AC326-MD/LA 2.8 MM
Price				
Featuring				
Image Sensor	2.0 MP CMOS, Smart-Hybrid light ,	2.0 MP High-performance CMOS	5 MP High-performance CMOS	5 MP High-performance CMOS
Lens	2.8 mm Fixed lens	2.8 /3.6 mm Fixed lens	2.8 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	D WDR	D WDR
Max. IR Distance	IR range up to 20m (65ft) Supplement Light Range White Light : Up to 20m (65ft)	IR range up to 20m (65ft)	IR range up to 20m (65ft)	IR range up to 20m (65ft) Supplement Light Range White Light : Up to 20m (65ft)
Lux	0.02 Lux @ (F2.2, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	-	-
Video Output	TVI, AHD, CVI, 960H	TVI	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps	5MP 2560 × 1944 @20fps
Audio In/Out	-	-	-	-
Protection	IP67	IP66	IP66	IP67
Power	12VDC	12VDC	12VDC	12VDC
Accessories	 1280ZJ-XS Junction Box			

Mini Turret Cameras

Turret Cameras



MODEL NUMBER	AC318-MD 2.8 / 3.6 MM	AC324F-FD4 2.8 / 3.6 MM	AC344-FD4(G) 2.8 / 3.6 MM	AC326-FD4(G)2.8 / 3.6 MM			
Price							
Featuring							
Image Sensor	8 MP High-performance CMOS	2.0 MP High-performance CMOS	2.0 MP High-performance CMOS	5 MP High-performance CMOS			
Lens	2.8 /3.6 mm Fixed lens	2.8 / 3.6 mm Fixed lens	2.8 /3.6 mm Fixed lens	2.8 /3.6 mm Fixed lens			
Wide Dynamic Range	D WDR	D WDR	120dB WDR	D WDR			
Max. IR Distance	IR range up to 20m (65ft)	IR range up to 20m (65ft) EXIR	IR range up to 40m (131ft)	IR range up to 40m (131ft)			
Lux	-	-	Color: 0.005 Lux @ (F1.6, AGC ON)	-			
Video Output	TVI, AHD, CVI, 960H	TVI	TVI	TVI, AHD, CVI, 960H			
Max. Resolution & Frame Rate	8MP 3840 x 2160 @20fps	2MP 1920×1080p @30fps	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps			
Audio In/Out	-	-	-	-			
Protection	IP66	IP66	IP66	IP66			
Power	12VDC	12VDC	12VDC	12VDC			
Accessories	 1280ZJ-XS Junction Box	 B1-XD-B Junction Box	 B1-XD-W Junction Box	 1280ZJ-M Junction Box	 1273ZJ-130-TRL Wall Mount	 1273ZJ-130B-TRL Wall Mount	 1271ZJ-130-TRL Pendant Mount

Turret Cameras



MODEL NUMBER	AC346-FD4 2.8 / 3.6 MM	AC346-FD/F 2.8 / 3.6 MM	AC326-FD4/U 2.8 MM	AC318-FD4(G) 2.8 / 3.6 MM		
Price						
Featuring	   	   	  	 		
Image Sensor	5 MP High-performance CMOS	5 MP High-performance CMOS	5 MP High-performance CMOS	8.29 MP High-performance CMOS		
Lens	2.8 /3.6 mm Fixed lens	2.8 /3.6 mm Fixed lens	2.8 mm Fixed lens	2.8 /3.6 mm Fixed lens		
Wide Dynamic Range	130dB WDR	120dB WDR	D WDR	D WDR		
Max. IR Distance	IR range up to 60m (196ft)	LED warm light range up to 20m (60ft)	IR range up to 40m (131ft) EXIR	IR range up to 60m (196ft)		
Lux	Color: 0.003 Lux @ (F1.6, AGC ON)	Full time color: 0.005 Lux @ (F1.6, AGC ON)	-	-		
Video Output	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H		
Max. Resolution & Frame Rate	5MP 2560 × 1944 @20fps	5MP 2560 × 1944 @20fps	5MP 2560 × 1944 @20fps	8.29MP 2560 × 2160 @30fps		
Audio In/Out	-	-	Built-in Mic	-		
Protection	IP66	IP67	IP66	IP66		
Power	12VDC	12VDC	12VDC	12VDC		
Accessories	 B1-XD-B Junction Box	 B1-XD-W Junction Box	 1280ZJ-M Junction Box	 1273ZJ-130-TRL Wall Mount	 1273ZJ-130B-TRL Wall Mount	 1271ZJ-130-TRL Pendant Mount

Motorized Turret Cameras



MODEL NUMBER	AC344-VD4Z	AC346D-VD4Z	AC326-VD4Z	AC318-VD4Z
Price				
Featuring	   	     	  	  
Image Sensor	2.0 MP High-performance CMOS	5 MP High-performance CMOS	5 MP High-performance CMOS	8.29 MP High-performance CMOS
Lens	2.8mm-12mm motorized Vari-Focal lens	2.8mm-12mm motorized Vari-Focal lens	2.8mm-12mm motorized Vari-Focal lens	2.8mm-12mm motorized Vari-Focal
Wide Dynamic Range	120dB WDR	120dB WDR	D WDR	D WDR
Max. IR Distance	IR range up to 40m (131ft)	IR range up to 60m (196ft)	IR range up to 40m (131ft)	IR range up to 40m (131ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.003 Lux @ (F1.6, AGC ON)	-	-
Video Output	TVI	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps	5MP 2560 × 1944 @20fps	8.29MP 3840 x 2160 @20fps
Audio In/Out	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12VDC	12VDC / 24VAC	12VDC	12VDC
Accessories	 1280ZJ-M Junction Box  1273ZJ-130-TRL Wall Mount  1273ZJ-130B-TRL Wall Mount  1271ZJ-130-TRL Pendant Mount			

Dome Cameras



MODEL NUMBER	AC344-OD 2.8 / 3.6 MM	AC326-OD 2.8 / 3.6 MM	AC318-OD 2.8 MM			
Price						
Featuring	   	  	  			
Image Sensor	2.0 MP High-performance CMOS	5 MP High-performance CMOS	8.29 MP High-performance CMOS			
Lens	2.8 /3.6 mm Fixed lens	2.8 / 3.6 mm Fixed lens	2.8 mm Fixed lens			
Wide Dynamic Range	120dB WDR	D WDR	D WDR			
Max. IR Distance	IR range up to 20m (65ft)	IR range up to 20m (65ft)	IR range up to 30m (98ft)			
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	-			
Video Output	TVI	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H			
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps	8.29MP 3840 x 2160 @20fps			
Audio In/Out	-	-	-			
Protection	IP67 - IK7	IP67 - IK7	IP67 - IK7			
Power	12VDC	12VDC	12VDC			
Accessories	 1280ZJ-DM18 Junction Box	 1275ZJ Pole Mount	 1276ZJ Corner Mount	 1258ZJ Wall Mount	 1272ZJ-110 Wall Mount	 1272ZJ-110B Wall Mount

Motorized Dome Cameras



MODEL NUMBER	DS-2CE56D8T-AVPIT3-Z	DS-2CE59H8T-VPIT3ZF	AC318D-OD4Z
Price			
Featuring	     	     	    
Image Sensor	2.0 MP High-performance CMOS	5 MP High-performance CMOS	8.29 MP High-performance CMOS
Lens	2.8mm-12mm motorized Focal lens	2.8mm-12mm motorized Focal lens	2.8mm-12mm motorized Focal lens
Wide Dynamic Range	130dB WDR	130dB WDR	D WDR
Max. IR Distance	IR range up to 60m (196ft)	IR range up to 60m (196ft)	IR range up to 60m (196ft)
Lux	Color: 0.003 Lux @ (F1.6, AGC ON)	Color: 0.003 Lux @ (F1.6, AGC ON)	-
Video Output	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps	8.29MP 3840 x 2160 @20fps
Audio In/Out	-	-	-
Protection	IP67 - IK10	IP67 - IK10	IP67 - IK10
Power	12VDC	12VDC	12VDC / 24VAC
Accessories	 1275ZJ Pole Mount  1276ZJ Corner Mount  1273ZJ-140 Wall Mount  1273ZJ-140B Wall Mount		

Mini Bullet Cameras



MODEL NUMBER	AC324F-MB 2.8MM	AC344-MB 2.8 MM	AC326-MB 2.8 / 3.6 MM	AC318-MB 2.8 MM
Price				
Featuring	2MP	2MP True WDR Starlight	5MP 4IN1	8MP 4IN1
Image Sensor	2.0 MP High-performance CMOS	2.0 MP High-performance CMOS	5 MP High-performance CMOS	8.29 MP High-performance CMOS
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 / 3.6 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	D WDR	120dB WDR	D WDR	D WDR
Max. IR Distance	IR range up to 20m (65ft)	IR range up to 20m (65ft)	IR range up to 20m (65ft)	IR range up to 30m (98ft)
Lux	-	Color: 0.005 Lux @ (F1.6, AGC ON)	-	-
Video Output	TVI	TVI	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps	8.29MP 3840 x 2160 @20fps
Audio In/Out	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12VDC	12VDC	12VDC	12VDC
Accessories	 1280ZJ-XS Junction Box  1275ZJ Pole Mount  1276ZJ Corner Mount			

Bullet Cameras



MODEL NUMBER	AC344-FB4 2.8 / 3.6 MM	AC326-FB4 2.8 / 3.6 MM	AC318-FB4 2.8 MM
Price			
Featuring	2MP True WDR Starlight	5MP 4IN1	8MP 4IN1
Image Sensor	2.0 megapixel progressive scan CMOS	5 MP CMOS image sensor	8.29 MP High-performance CMOS
Lens	2.8 /3.6 mm Fixed lens	2.8 /3.6 mm Fixed lens	2.8 mm Fixed lens
Wide Dynamic Range	120dB WDR	D WDR	D WDR
Max. IR Distance	IR range up to 40m (131ft)	IR range up to 40m (131ft) EXIR	IR range up to 60m (196ft)
Lux	Color: 0.003 Lux @ (F1.6, AGC ON)	-	-
Video Output	TVI	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	2MP 1920 × 1080 @30fps	5MP 2560 × 1944 @20fps	8.29MP 2560 × 2160 @30fps
Audio In/Out	-	-	-
Protection	IP66	IP66	IP66
Power	12VDC	12VDC	12VDC
Accessories	 1280ZJ-S Junction Box  1275ZJ Pole Mount  1276ZJ Corner Mount		

Motorized Bullet Cameras



MODEL NUMBER	AC344D-VB4Z	AC336D-VB4Z	AC346D-VB4Z	AC318D-VB4Z
Price				
Featuring				
Image Sensor	2.0 MP High-performance CMOS	5 MP High-performance CMOS	5 MP High-performance CMOS	8.29 MP High-performance CMOS
Lens	2.8mm-12mm motorized vari-focal lens	2.8mm-13.5mm motorized vari-focal lens	2.8mm-12mm motorized vari-focal lens	2.8mm-12mm motorized vari-focal
Wide Dynamic Range	120dB WDR	D WDR	130dB WDR	D WDR
Max. IR Distance	IR range up to 40m (131ft)	IR range up to 40m (131ft)	IR range up to 40m (131ft)	IR range up to 40m (131ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	-	Color: 0.003 Lux @ (F1.6, AGC ON)	-
Video Output	TVI	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H	TVI, AHD, CVI, 960H
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	5MP 2560 × 1944 @20fps	5MP 2560 × 1944 @20fps	8.29MP 3840 x 2160 @20fps
Audio In/Out	-	-	-	-
Protection	IP67	IP67	IP67	IP67
Power	12VDC / 24VAC	12VDC / 24VAC	12VDC / 24VAC	12VDC / 24VAC
Accessories				

PTZ Cameras



MODEL NUMBER	AP312-IR / 32X	AP312-IR / 25X	AP112-IR / 25X
Price			
Featuring			
Image Sensor	1/2.8" High-performance CMOS	1/2.8" High-performance CMOS	1/2.8" High-performance CMOS
Lens	4.8 mm-153 mm focal length	4.8 mm-153 mm focal length	4.8 mm-120 mm focal length
Optical lens	32x optical zoom, 16x digital zoom	25 optical zoom, 16x digital zoom	25 optical zoom, 16x digital zoom
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 150m (492ft)	IR range up to 150m (492ft)	IR range up to 100m (328ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)
Pan	360°	360°	360°
Til	-15° ~ 90° auto flip	-15° ~ 90° auto flip	-15° ~ 90° auto flip
Video Output	TVI, AHD, CVI, 960H	TVI	TVI
Max. Resolution & Frame Rate	2MP 1920×1080p @30fps	2MP 1920×1080p @30fps	2MP 1920×1080p @30fps
Protection	IP66	IP66	IP66
Power	24VAC	24VAC	12VDC
Accessories			

THE NEW BLUE|LINE



**Cost-Effective,
Easy Remote Viewing**

• Support P2P - Scan QR code to get online

NETWORK VIDEO RECORDERS

• 4K resolution • IVS
• H.265 • P2P

LITE SERIES

NVR4 SERIES

- Support up to 8MP recording
- Smart H.265+
- Max 200Mbps Incoming Bandwidth
- Up to 2ch@4K/8ch@1080P decoding
- HDMI/VGA simultaneous video output
- Heat Map
- IVS: Tripwire, Intrusion, People Counting

PRO SERIES

NVR5 SERIES

- Support up to 12MP recording
- Smart H.265+
- Max 320Mbps Incoming Bandwidth
- Heat Map
- 1-8 PoE Ports Support 800m ePoE & EoC
- Fisheye Dewarp (IVS & Face Detection)
- SMD (AI Smart Motion Detection)
- POS (Point of Sale)

ULTRA SERIES

NVR6 SERIES



- Intel Processor
- Smart H.265+
- Support Up to 8MP recording
- RAID 0 | 1 | 5 | 6 | 10
- Max 384Mbps Incoming Bandwidth
- Heat Map • Smart Tracking
- N + M Hot Standby
- Fisheye Dewarp
- ANPR • Advanced Intelligence (IVS & Face Detection)
- SMD (AI Smart Motion Detection)
- POS (Point of Sale)

LITE 4K NVR

Recommended APPS



DMSS
iphone / Android



MODEL NUMBER	NVR431HP4-4-4K	NVR432HP8-8-4K	NVR432HP6-16-4K
Processor	Quad-Core Embedded Processor		Industrial-grade Embedded Processor
IP Video Input	4 CH	8 CH	16 CH
Video Output	1 HDMI /1 VGA		
Multiplex Option	Recording, Smart Playback, Backup, Live & Remote Access		
Recording Resolution	8Mp/ 6Mp/ 5MP/ 4MP/ 3MP/ 1080P/ 1.3MP/ 720P		
Max Decoding	2CH @ 4k / 4CH @ 1080P	2CH @ 4k / 8CH @ 1080P	
Audio In/Out	1/1 (Two way audio)		
Alarm In/Out	N/A	4/2	
Build-in POE	4 Ports (IEEE802.3at/af) 50W	8 Ports (IEEE802.3at/af) 130W	16 Ports (IEEE802.3at/af) 117W
Network	1 RJ-45 Port 10/100Mbps	1 RJ-45 port 10/100/1000Mbps	
Storage	1 SATA III Port(up to 10TB each HDD)	2 SATA III Port(up to 10TB each HDD)	
Max Input/ Record	80Mbps / 80Mbps	200Mbps / 200 Mbps	
Decoding Format	Smart H.265+/ H.265 / Smart H.264+/ H.264		
USB Connections	2 USB 2.0	Rear: 1 x USB3.0, Front: 1 x USB2.0	
Dimensions	Compact 1U: 10.2"(W) x 8.9"(D) x 1.9"(H)	1U: 14.8"(W) x 11.1"(D) x 2.2"(H)	1U: 14.76"(W) x 12.89"(D) x 2.12"(H)
Intelligent	Tripwire, Intrusion Abandoned/Missing, Scene Change, Face Detection, People Counting, Heat Map.		
Star Features	Plug & Play & P2P, SMD		

LITE 4K NVR		PRO 4K NVR	
Recommended APPS  DMSS iphone / Android	    	    	      
MODEL NUMBER	NVR424HP6-16-4K	NVR522HP6-32-4KE	iNVR434HP6-32-4K
Prossesor	Quad-Core Embedded Processor		Industrial-grade Embedded Processor
IP Video Input	16CH	32CH	32CH
Video Output	1 HDMI/1 VGA		
Multiplex Option	Recording, Smart Playback, Backup, Live & Remote Access		
Recording Resolution	8Mp/ 6Mp/ 5MP/ 4MP/ 3MP/ 1080P/ 1.3MP/ 720P	12MP/8Mp/ 6Mp/ 5MP/ 4MP/ 3MP/ 1080P/ 1.3MP/ 720P	
Max Decoding	2CH @ 4k / 8CH @ 1080p	4CH @ 4K/8CH @1080P	
Audio In/Out	1/1 (Two way audio)		
Alarm In/Out	16/4	4/2	N/A
Build-in POE	16 Ports (IEEE8023at/af) 130W	16 Ports (IEEE8023at/af)130W 1-8 PoE Ports for ePoE & EoC	16 PoE Ports
Network	1RJ-45 Port (10/100/1000Mbps)		
Storage	4 SATA III Ports, Up to 6 TB capacity for each HDD	2 SATA III Ports, Up to 10 TB capacity each SATA	4 SATA III Ports, Up to 10 TB capacity each SATA
Max Input / Record	200Mbps /200 Mbps	320Mbps /320 Mbps	Up To 256Mbps AI off / 160 Mbps AI On
BIT RATE	16kbps ~ 20Mbps Per Channel		
Decoding Format	Smart H.265+ / H.265 / Smart H.264+ / H.264		
USB Connections	Rear: 2x USB3.0, Front: 1 x USB2.0	Rear: 1x USB3.0, Front: 1 x USB2.0	
Dimensions	1.5U: 17.3"(W) × 16.2"(D) × 3.0"(H)	1U: 14.8"(W)×12.9"(D)×2.1"(H)	1.5U: 17.32"(W) × 16.36"(W) × 2.99"(H)
Intelligent	Tripwire, Intrusion Abandoned/Missing, Scene Change, Face Detection, People Counting, Heat Map.		AI Perimeter, 2ch Face Recognition, SMD Human & Vehicle
Star Features	Plug & Play / P2P	Fisheye Dewarp, ANPR, POS, P2P, Plug & Play	

You need more distance, enhanced Power over Ethernet (ePoE) solves this issue, allowing for the same transmission of data and power but over greater distances. PoE has a limited transmission distance of only 100 meters; longer transmission distances require additional "switches" increasing installation and maintenance costs



Power	Speed	Distance
25.5W	1000Mbps	100m
25.5W	100Mbps	300m
13W	10Mbps	800m



PoE

ePoE

ePoE

A) You need more distance, ePoE can reach 800m

B) Do you have coax cameras? you can use EOC-102RX and EOC-102TX, to get Internet over Coax.



EOC-102

Power Over Coax Extender

- 1*10/100 Mbps Base TX + 1*BNC
- RG59 coaxial cable Max: 400m /100 Mbps, 1000 / 10 Mbps
- High level lightning protection
- -30°C ~+65°C

EOC-102RX/TX



1-8 PoE Ports Support 800m ePoE & EoC

ACUPICK

AcuPick 2.0 supports target searches for humans, vehicles, and animals. Its precise detection and tracking capabilities make it an ideal choice for enhanced security and surveillance, catering to a wide range of applications.

Human Search

Animal Search

Vehicle Search

APPLICATION



ULTRA 4K SUPER NVR

Recommended APPS



DMSS
iphone / Android



New Item



New Item

MODEL NUMBER	iNVR538-32-4K	iNVR538-64-4K
Processor	Industrial-grade processor	
IP Video Input	32CH	64CH
Video Output	2HDMI/1VGA	
Multiplex Option	Recording, Smart Playback, Backup, Live & Remote Access	
Recording Resolution	12MP/8Mp/ 6Mp/ 5Mp/ 4MP/ 3MP/ 1080P/ 1.3MP/ 720P	
Max Decoding	4CH @ 4k / 16CH @ 1080p	
Audio In/Out	1/1 (Two way audio)	
Alarm In/Out	16/8	
Build-in POE	N/A	
Network	2 Gigabit Ports	
Storage	8 SATA ports, Up to 16TB Each , Raid (Redundancy) 0/1/5/6/10. 1 ESATA	
Max Input / Record	384Mbps/384Mbps	
BIT RATE	16kbps ~ 20Mbps Per Channel	
Decoding Format	H.265 / H.264+ / H.264	
USB Connections	Rear: 2x USB3.0, Front: 2 x USB2.0	
Dimensions	2U: 17.32"(W) × 18.03"(W) × 3.5"(H)	
Intelligent Video	AI Perimeter: 2ch Face Recognition, Face detection, Perimeter Protection, SMD Plus	
Star Features	Fisheye Dewarp, Smart Track, ANPR(up to 8ch) , POS, Plug & Play, N+M Hot Standby	

AI (Smart Motion Detection) 2.0



Smart Dual Illuminators

Camera defaults to infrared light, it turns on warm LED light when detecting human.
Camera switches back to infrared light after human leave.

- Recording colorful video and information of key events.
- Minimize light pollution because warm LED do not need to be turned on continuously



Human / Vehicle is out of Monitoring Area

- Infrared light turns ON.
- Video is black / white



Human / Vehicle is Detected by Camera

- Warm LED turns ON.
- Full-color monitoring



Human / Vehicle Leave Monitoring Area

- Infrared light turns ON.
- Video is black / white

AI SMD+ 2.0 Dual Illuminator Turret Network Cameras

Active Deterrence Turret Camera



MODEL NUMBER	IPC-EB2449TM-ILM-2.8	IPC-EB2849TM-ILM-2.8	IPC-EB384H-IRM-PV
Price			
Featuring			
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.8" CMOS image sensor
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	Dual Illuminator: (1)IR, (1) LED Warm light range up to 30m (98ft)	Dual Illuminator: (1)IR, (1) LED Warm light range up to 30m (98ft)	(1)IR range up to 30m (98ft)(1) LED Active Deterrence Strobe Light
Lux	Color: 0.008 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)	Color: 0.007 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	4MP 2688 × 1520@30 fps	8MP 3840 × 2160@30 fps	8MP 3840 × 2160@30 fps
Audio In/Out	Built-in Mic	Built-in Mic	Built-in Mic & Speaker, 2 Way Audio
Protection	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories	AA1300-E Junction Box AB2030W Wall Mount AB1520-P Pole Mount		

Turret Network Cameras



MODEL NUMBER	IPC-EB244TM-IR-S 2.8 MM	IPC-EB344TM-IR 3.6 MM	IPC-EB284TM-IR 2.8 MM	IPC-EB284TM-IR-S 2.8 MM
Price				
Featuring				
Image Sensor	1/2.9" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8 mm fixed lens	3.6 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	0.008 lux@F1.6 (Color, 30 IRE)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	4MP 2688 × 1520@30 fps	4MP 2688 × 1520@30 fps	8MP 3840×2160 @15fps	8MP 3840×2160 @15fps
Audio In/Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic
Protection	IP67	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories	 AA1300-E Junction Box AB2030W Wall Mount AB1520-P Pole Mount			

Motorized Network Turret Cameras



MODEL NUMBER	IPC-EB244T-IR-ZS	IPC-EB344R-IR-ZAS	IPC-EB284T-IR-S-ZS
Price			
Featuring			
Image Sensor	1/2.9" CMOS image sensor	1/2.9" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8mm-13.5 mm motorized Focal lens	2.8mm-13.5 mm motorized Focal lens	2.8mm-13.5 mm motorized Focal lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 40m (131ft)	IR range up to 40m (131ft)	IR range up to 40m (131ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	4MP 2688 × 1520@30 fps	4MP 2688 × 1520@30 fps	8MP 3840×2160 @15fps
Audio In/Out	-	Built-in Mic	Built-in Mic
Protection	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories	 AA1300-E Junction Box AB2030W Wall Mount AB1520-P Pole Mount		

Dome Network Cameras



MODEL NUMBER	IPC-MD244F-IRM-2.8MM	IPC-MD244E-IR-S-2.8 MM	IPC-MD244E-IR 3.6 MM	IPC-MD344E-IR 3.6 MM
Price				
Featuring				
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8 mm fixed lens	2.8 mm fixed lens	3.6 mm fixed lens	3.6 mm fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 40m (131ft)	Warm LED range up to 40m (131ft)	Warm LED range up to 40m (131ft)	IR range up to 30m (98ft)
Lux	Color: 0.008 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	4MP 2688 × 1520@30 fps	4MP 2688 × 1520@30 fps	4MP 2688 × 1520@30 fps	8MP 3840×2160 @15fps
Audio In/Out	Built-in Mic	Built-in Mic	Audio In / Audio Out	-
Protection	IP67	IP67 - IK10	IP67 - IK10	IP67 - IK10
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories				

Dome Network Camera

Motorized Network Dome Cameras



MODEL NUMBER	IPC-MD254E-IR-2.8MM	IPC-MD284E-IR-S 2.8MM	IPC-VD254R-IR-Z	IPC-VD284R-IR-ZAS-S
Price				
Featuring				
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8mm-13.5 mm motorized Focal lens	2.8mm-13.5 mm motorized Focal lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 40m (131ft)	IR range up to 40m (131ft)
Lux	Color: 0.007 Lux @ (F1.6, AGC ON)	Color: 0.009 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	5MP 2960 × 1668@20fps	8MP 3840×2160@15fps	5MP 2960 × 1668@20fps	8MP 3840×2160@15fps
Audio In/Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic
Protection	IP67	IP67 - IK10	IP67	IP67
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories				

PRO AI SMD Mini Bullet Network Cameras

Mini Bullet Network Cameras



MODEL NUMBER	IPC-MB344E-IR 2.8 MM	IPC-MB244S-IR 2.8 / 3.6 MM	IPC-MB284S-IR 2.8 MM
Price			
Featuring			
Image Sensor	1/3" CMOS image sensor	1/3" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8 mm fixed lens	2.8 / 3.6 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 50m (164ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	4MP 2688 × 1520@30 fps	4MP 2688 × 1520@30 fps	8MP 3840×2160 @15fps
Audio In/Out	Built-in Mic	-	-
Protection	IP67	IP67	IP67
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories			

Motorized Bullet Network Cameras



MODEL NUMBER	IPC-BU244T-IR ZAS	IPC-BU344T-IR-ZAS	IPC-BU284T-IR-ZAS	IPC-BU284T-IR-ZAS-S
Price				
Featuring				
Image Sensor	1/3" CMOS image sensor	1/3" CMOS image sensor	1/3" CMOS image sensor	1/3" CMOS image sensor
Lens	2.8mm-13.5 mm motorized Focal lens	2.8mm-13.5 mm motorized Focal lens	2.8mm-13.5 mm motorized Focal lens	2.8mm-13.5 mm motorized Focal lens
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 50m (164ft)	IR range up to 50m (164ft)	IR range up to 60m (198ft)	IR range up to 60m (198ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)	Color: 0.008 Lux @ (F1.6, AGC ON)
Max. Resolution & Frame Rate	4MP 2688 × 1520@30 fps	4MP 2688 × 1520 @30fps	8MP 3840×2160 @15fps	8MP 3840×2160 @15fps
Audio In/Out	Audio In / Audio Out	Audio In / Audio Out	Audio In / Audio Out	Built-in Mic, Audio In / Audio Out
Protection	IP67, IK10	IP67, IK10	IP67	IP67
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories				



180 Degree Wide Angle Image Splicing:
See more than ever with dual lenses that capture the world in detail. Through the power of inbuilt AI, these dual images are then spliced together to provide 180 degree viewing in a single frame.

180 Degree Camera



MODEL NUMBER	IPC-EBD5849-ASMT 180-LED	
Price		
Featuring	8MP True WDR H.265 Color Day & Night SMD 2-Way Audio AI SD 8MP Resolution People Counting	
Image Sensor	Dual 1/1.8" CMOS	
Lens	3.6 mm to Infinite fixed lens	
Wide Dynamic Range	140dB WDR	
Max. IR Distance	4 (Warm LED light) up to 40 m (131.23 ft)	
Lux	0.0005 lux@F1.0 (Color, 30 IRE)	
Max. Resolution & Frame Rate	8MP 4096 (H) × 1800 (V)	
Audio In/Out	Built-in Mic & Speaker, Support 2 Way Audio (Audible Warning)	
Protection	IP67	
Memory Slot	Built-in micro SD Slot, Max up to 256GB	
Power	12VDC, PoE	
Accessories	 AB1140 Junction Box  AB2030W Wall Mount  AB1520-P Pole Mount	

HAVE YOUR OWN BRAND

- GSS OFFERS PRIVATE LABELING:
- You can have your company logo placed on many of our high quality products!
 - We also offer non-branded products.
 - Call today and find out more about this exclusive service.



Fish-eye Dewrap Mode in SmartPSS



Fish-eye Network Cameras



MODEL NUMBER	IPC-FE554-M	IPC-FE544-IR	IPC-FE864-IR	IPC-FE8124-IRA-S2
Price				
Featuring				
Image Sensor	1/2.7"5Megapixel progressive CMOS	1/2.7"5Megapixel progressive CMOS	1/1.8" progressive scan STARVIS™ CMOS	1/1.7" progressive scan STARVIS™ CMOS
Lens	1.4 mm focal length	1.4 mm focal length	1.7mm focal length, Panamorph lens RPL: B4QQV	1.85mm focal length
Angle View	H:180°, V:180°	H:180°, V:180°	H:180°, V:180°	H:180°, V:180°
Dewrap Mode	N/A	N/A	Original ,Panoramic, Double Panoramic, 1+3, Eptz, 4 pictures	Original ,Panoramic, Double Panoramic, 1+3, Eptz, 4 pictures
Wide Dynamic Range	120 dB WDR	120 dB WDR	D WDR	D WDR
Max. IR Distance	N/A	IR range up to 10m (32ft)	IR range up to 10m (32ft)	IR range up to 10m (32ft)
Lux	0.006 Lux@F2.0 (Color, 30IRE)	0.006 Lux@F2.0 (Color, 30IRE)	-	-
Max. Resolution & Frame Rate	5M (2592 × 1944) 30fps	5M (2592 × 1944) 30fps	6MP 3072x2048@30 fps	12MP 4000x3000 @ 25fps
Audio In/Out	Built-in Mic	Built-in Mic // Audio In / Audio Out	Built-in Mic & Speaker // Audio In / Audio Out	Built-in Mic & Speaker // Audio In / Audio Out
Protection	IP67, IK10	IP67, IK10	IP67, IK10	IP67, IK10
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 128GB	Built-in micro SD Slot, Max up to 128GB
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE	12VDC, PoE
Accessories				

SMD Network PTZ Cameras



MODEL NUMBER	IPC-PD6C225U-W	IPC-PD49425XB-W	IPC-PD5A445XA-W
Price			
Featuring			
Image Sensor	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS
Lens	4.8 mm-120 mm focal length	4.8 mm-120 mm focal length	3.95mm~177.7mm focal length
Optical lens	25x optical zoom, 16x digital zoom	25x optical zoom, 16x digital zoom	45x optical zoom, 16x digital zoom
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 200m (656ft)	IR range up to 100m (328ft)	IR range up to 150m (492ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)
Pan	360°	360°	360°
Til	-20° ~ 90° auto flip	-15° ~ 90° auto flip	-15° ~ 90° auto flip
Smart VCA	Auto Tracking, Smart Motion Detection	Smart Motion Detection	Auto Tracking, Smart Motion Detection
Max. Resolution & Frame Rate	2MP 1920 x 1080 @30fps	4MP 2560x 1440 @30fps	4MP 2560x1440 @30fps
Protection	IP67, IK10	IP66	IP67, IK10
Memory Slot	Built-in micro SD Slot, Max up to 128GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB
Power	AC24V, Support PoE+	12VDC, Support PoE+	AC24V, Support PoE+
Accessories			

NKB1000

- Keyboard to Control:
- GSS Standalone DVRs, NVRs and Video Walls
 - GSS Network High Speed Pan Tilt Zoom Domes
 - Network Video Servers
 - NKB1000: RS485, RS422, USB, RS232 & IP Network
 - Connect to SmartPSS via USB (NKB1000 only)



AI

TECHNOLOGY

TVI

HDCVI

AHD

CVBS

IP

• AI Coding, H.265+, H.265

Improves Encoding Efficiency
Reducing Overall System Cost

• All-Over-Coax

Coaxial Audio/Alarm
Firmware Upgrade

• Cost / Performance

Advance Processors
Provide Good Image Quality
And Color with Optimized
Cost effectiveness

• Face Recognition

2 channels (up to 12 face images/s)
face images in total. Name, gender,
birthday, address, certificate type, cerifi-
cate No., countries®ions and state
can be added to each face picture

SMD Plus

- AI Detection (Humans, Vehicles)
- False Alarms (Animals, Rain, Rustling Leaves, Lights)

AI 2MP/5MP-N "5 in 1" Penta-Brid XVR

Recommended APPS



DMSS
iphone / Android



Model Number	iXVR541H-4	iXVR541H-8	iXVR541H-16	iXVR542AN-32
BNC Video Input	4 CH	8 CH	16 CH	32ch
IP Video Input	4+2 IP CH Up to 6 MegaPixels	8+4 IP CH Up to 6 MegaPixels	16+8 IP CH Up to 6 MegaPixels	Up To 32 IP CH (up to 6 MegaPixels)
Video Output	1 HDMI/1 VGA (1920X1080P)			1HDMI (4K), VGA
Multiplex Option	Recording, Smart Playback, Backup, Live & Remote Access			
Recording Resolution	5M-N, 4M-N, 1080P, 1080N, 720P, 960H, D1, CIF			
Synchronous Playback	4 CH	8 CH	16CH	1/4/9/16
Audio In/Out	1 / 1, 2 way Audio Over Coax			
Alarm In/Out	N/A			
Max IP Input / Record	32Mbps/32Mbps	64Mbps/64Mbps	96Mbps/96Mbps	128Mbps
Network	1 RJ-45 Port (100M)			
Storage	1 SATA port (up to 6TB capacity for	1 SATA Port (Up to 10TB each Disk)		2 SATA Ports (Up To 16TB each disk)
Decoding format	H.265+/H.265/H.264+/H.264			
USB Connections	Rear: 1 x USB 2.0, Front: 1 x USB 2.0			1 front USB 2.0 port, 1 rear USB 3.0 port)
Dimensions	Mini 1U: 12.8"(W) x 10"(D) x 2.2"(H)			1U: 14.76"(W) x 11.39"(D) x 2.09"(H)
, FIntelligent Video	AI Perimeter: 1ch Face Recognition, SMD Human & Vehicle	AI Perimeter: 2ch Face Recognition, SMD Human & Vehicle		
Star Features	IoT, P2P, Coaxial Audio/ Alarm/ Upgrade , 2D/3DNR			

AI 4K "5 in 1" Penta-Brid XVR

Recommended APPS



DMSS
iphone / Android



MODEL NUMBER	iXVR541H-4-4KL	iXVR541H-8-4KL	iXVR541H-16-4KL
BNC Video Input	4CH	8 CH	16CH
IP Video Input	4+4 Channel, each channel up to 8 MegaPixels	8+8 Channel, each channel up to 8 MegaPixels	16+16 Channel, each channel up to 8 MegaPixels
Video Output	1 HDMI(3840×2160) /1 VGA (1920X1080P)		
Multiplex Option	Recording, Smart Playback, Backup, Live & Remote Access		
Recording Resolution	4K, 6MP, 5MP, 4MP, 3MP, 4M-N, 1080P, 720P, 960H, D1, CIF, QCIF		
Synchronous Playback	1/4	1/4/9	1/4/9/16
Audio In/Out	1/1RCA, Audio Over Coax		
Alarm In/Out	N/A		
Max IP Input / Record	64Mbps/64Mbps	128Mbps	
Network	1 RJ-45 Port (1000M)		
Storage	1 SATA port (up to 16TB capacity for each disk)		
Decoding format	AI Coding/H.265+/H.265/H.264+/H.264		
USB Connections	Rear: 1 x USB 2.0, Front: 1 x USB 2.0	Rear: 1x USB 3.0, Front: 1 x USB 2.0	
Dimensions	1U: 12.80"(W) x 10.10"(D) x 2.17"(H)		
Intelligent Video	AI Perimeter: 1ch Face Recognition, SMD Human & Vehicle	AI Perimeter: 2ch Face Recognition, SMD Human & Vehicle	
Star Features	IoT, POS, P2P, Coaxial Audio/ Alarm/ Upgrade , 2D/3DNR		

AI 4K "5 in 1" Penta-Brid XVR

Recommended APPS



DMSS
iphone / Android



MODEL NUMBER	iXVR542AN-16-4KL	iXVR544L-32-4KL	iXVR548S-32-4KL
BNC Video Input	16CH	32CH	32CH
IP Video Input	16+16 Channel, each channel up to 8 Mega Pixels	Up To 32 IP CH (up to 12 MegaPixels)	
Video Output	1HDMI (4K), VGA	2HDMI /1VGA/1BNC	
Multiplex Option	Recording, Smart Playback, Backup, Live & Remote Access		
Recording Resolution	4K, 6MP, 5MP, 4MP, 3MP, 4M-N, 1080P, 720P, 960H, D1, CIF, QCIF		
Synchronous Playback	1/4/9/16		
Audio In/Out	1/1RCA, Audio Over Coax	4-channel BNC / 32-channel BNC (Coaxial Audio)	
Alarm In/Out	N/A	16/6	
Max IP Input / Record	128Mbps		
Network	1 RJ-45 Port (1000M)		
Storage	2 SATA Ports (Up To 16TB each disk)	4 SATA Ports (Up To 16TB each disk) 1 eSATA	8 SATA Ports (Up To 16TB each disk) 1 eSATA
Decoding format	AI Coding /H.265+/H.265/H.264+/H.264		
USB Connections	1 front USB 2.0 port, 1 rear USB 3.0 port)	2 (1 front USB 2.0 port, 1 rear USB 3.0 port)	
Dimensions	1U: 14.76"(W) × 11.39"(D) × 2.09"(H)	1.5U: 17.32"(W) × 16.54"(D) × 2.99"(H)	2U: 17.32"(W) × 18.23"(D) × 3.73"(H)
Intelligent Video	AI Perimeter: 2ch Face Recognition, SMD Human &	AI Perimeter: 6ch Face Recognition, SMD Human & Vehicle	
Star Features	IoT, POS, P2P, Coaxial Audio/ Alarm/ Upgrade , 2D/3DNR		

XVI Cameras



MODEL NUMBER	XVI-MD152E-IR 2.8	XVI-EB152TM-IRM 2.8	XVI-EB152T-DLM 2.8
Price			
Featuring			
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	D WDR	D WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 60m (196ft)	Dual Illuminator: (1)IR, (1) LED Warm light range up to 40m (131ft)
Lux	-	Starlight : 0.005 Lux/F1.6, 30IRE	0.01 lux@F2.0 (Color, 30 IRE), 0.001 lux@F2.0 (B/W, 30 IRE)
Max. Resolution & Frame Rate	5MP 2592x1944@20fps	5MP 2880 x 1620@25 fps	8 MP 3840 x 2160@15fps
Audio In/Out	-	Built-in Mic	Built-in Mic
Protection	IP67 - IK10	IP67	IP67
Video Output	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS
Power	12VDC	12VDC	12VDC
Accessories	AA1300-E Junction Box AB2030W Wall Mount AB1520-P Pole Mount		

XVI Cameras



MODEL NUMBER	XVI-EB182M-IR 2.8	XVI-EB182T-IRM 2.8	XVI-EB182T-DLM 2.8
Price			
Featuring			
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.8 mm fixed lens	2.8 mm fixed lens	2.8 mm fixed lens
Wide Dynamic Range	120dB WDR	DWDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 40m (131ft)	Dual Illuminator: (1)IR, (1) LED Warm light range up to 40m (131ft)
Lux	-	-	0.01 lux@F2.0 (Color, 30 IRE), 0.001 lux@F2.0 (B/W, 30 IRE)
Max. Resolution & Frame Rate	8MP 3840 x 2160@15fps	8MP 3840 x 2160@15fps	8MP 3840 x 2160@15fps
Audio In/Out	-	Built-in Mic	Built-in Mic
Protection	IP67	IP67	IP67
Video Output	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS
Power	12VDC	12VDC	12VDC
Accessories	B2-W + B2-2-W(OPTIONAL) Junction Box	AA1300-E Junction Box AB2030W Wall Mount	AB1520-P Pole Mount

Motorized XVI Cameras



MODEL NUMBER	XVI-EB152T-IR-ZA	XVI-EB182T-IR-ZA	XVI-VD122R-IR-Z
Price			
Featuring	   	    	   
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.7 ~ 12mm Motorized lens	2.7 ~ 13.5 mm Motorized lens , Auto Focus	2.7 ~ 13.5 mm Motorized lens , Auto Focus
Wide Dynamic Range	D WDR	120dB WDR	D WDR
Max. IR Distance	IR range up to 60m (196ft)	IR range up to 60m (196ft)	IR range up to 30m (98ft)
Lux	-	-	-
Max. Resolution & Frame Rate	5MP 1920 x 1080@20fps	8MP 3840 x 2160@15 fps	2MP 1920 x 1080@30 fps
Audio In/Out	Built-in Mic	Built-in Mic	-
Protection	IP67	IP67	IP67 - IK10
Video Output	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS
Power	12VDC	12VDC	12VDC
Accessories	 AA1300-E Junction Box  AB2030W Wall Mount  AB1520-P Pole Mount	 AB1140 Junction Box  AB2030W Wall Mount  AB1520-P Pole Mount	

Motorized XVI Cameras



MODEL NUMBER	XVI-VD152R-IR-Z	XVI-VD182R-IR-Z	XVI-BU122R-IR Z	XVI-BU182R-IR Z
Price				
Featuring	   	   	  	   
Image Sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor	1/2.7" CMOS image sensor
Lens	2.7 ~ 12mm Motorized lens	2.7 ~ 13.5 mm Motorized lens, Auto Focus	2.7 ~ 12mm Motorized lens	2.7 ~ 13.5 mm Motorized lens, Auto Focus
Wide Dynamic Range	DWDR	DWDR	120dB WDR	D WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)	IR range up to 30m (98ft)
Lux	-	-	-	-
Max. Resolution & Frame Rate	5MP 2880 x 1620@25 fps	8MP 3840 x 2160@15fps	2MP 1920 x 1080@30 fps	8MP 3840 x 2160@15fps
Audio In/Out	-	-	-	Built-in Mic
Protection	IP67 - IK10	IP67 - IK10	IP67	IP67
Video Output	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS
Power	12VDC	12VDC	12VDC	12VDC
Accessories	 AB1140 Junction Box  AB2030W Wall Mount  AB1520-P Pole Mount	 AA1250 Junction Box  AB2030W Wall Mount  AB1520-P Pole Mount		

Motorized CVI Turret Cameras



Motorized CVI Bullet Cameras



MODEL NUMBER	CVI-EB240R-IR-Z	CVI-BU223R-IR-Z	CVI-BU240R-IR-Z
Price			
Featuring			
Image Sensor	1/3" CMOS image sensor	1/2.8" CMOS	1/2.7" CMOS image sensor
Lens	2.7 ~ 13.5 mm Motorized lens, Auto focus	2.7 ~ 13.5 mm Motorized lens, Auto focus	2.7 ~ 13.5 mm Motorized lens, Auto focus
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	IR range up to 30m (98ft)	IR range up to 60m (196ft)	IR range up to 60m (196ft)
Lux	0.005Lux/F1.3, 30IRE, 0Lux IR on	0.005Lux/F1.3, 30IRE, 0Lux IR on	0.005Lux/F1.3, 30IRE, 0Lux IR on
Max. Resolution & Frame Rate	4.1MP 2688 x 1520@25 fps	2.1MP 1937 x 1097@30fps	4MP 2688 x 1520@25 fps
Audio In/Out	-	-	-
Protection	IP67	IP67	IP67
Video Output	HDCVI	HDCVI	HDCVI
Power	12VDC	12VDC	12VDC
Accessories	AA1300-E Junction Box AB2030W Wall Mount AB1520-P Pole Mount	PFA135 Junction Box AA1250 Junction Box W-SD/CMB60 Corner Mount Bracket AB1520-P Pole Mount	

SMART PSS

Security Management Platform

Support OS	Windows /Mac OSX
Number Of Devices	64
Number Of Channels	256
Smart Features	Fisheye Correction, People Counting , Smart Search, E-Map, E-PTZ, Smart Track IVS, Face Detection
Smart Features	Video Intercome, Acces Control, Attendance
Support VTO - VTH	64/256

4 in 1 PTZ Cameras



MODEL NUMBER	XVI-PD42215L-S	XVI-PD49225L-W	XVI-PD6CE225-W
Price			
Featuring			
Image Sensor	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS	1/2.8" STARVIS™ CMOS
Lens	5 mm ~ 75 mm focal length	4.8 mm-120 mm focal length	4.8 mm-120 mm focal length
Optical lens	15x optical zoom, 16x digital zoom	25x optical zoom, 16x digital zoom	25x optical zoom, 16x digital zoom
Wide Dynamic Range	120dB WDR	120dB WDR	120dB WDR
Max. IR Distance	-	IR range up to 100m (328ft)	IR range up to 200m (656ft)
Lux	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)	Color: 0.005 Lux @ (F1.6, AGC ON)
Pan	360°	360°	360°
Til	-2° ~ 90° auto flip	-15° ~ 90° auto flip	-15° ~ 90° auto flip
Audio In/Out	Support	Support	Support
Alarm In/ Out	Support	Support	Support
Max. Resolution & Frame Rate	2MP 1920x 1080p @30fps	2MP 1920x 1080p @30fps	2MP 1920x 1080p @30fps
Protection	IP67, IK10	IP66	IP66
Video Output	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS
Power	12VDC	12VDC	AC24V/3A
Accessories	PFB302S Wall Mount PFA101 Mount Adapter W-SD/CMB60 Corner Mount W-SD/PMB60 Pole Mount W-SD/HPM60 (PFB300C) Ceiling Mount	W-T5000 12VDC Power Supply PFA111 Mount Adapter W-SD/CMB60 Corner Mount PFA120 Mount Base-Applies to PFB305W W-SD/PMB60 Pole Mount W-SD/HPM60 (PFB300C) Ceiling Mount	PFA120 Mount Base-Applies to PFB305W PFA111 Mount Adapter W-SD/CMB60 Corner Mount W-SD/PMB60 Pole Mount W-SD/HPM60 (PFB300C) Ceiling Mount



GSS TECHNICAL SUPPORT

GSS TECHNICAL SUPPORT STRIVES TO PROVIDE A INDUSTRY LEADING SUPPORT TO OUR MANY INSTALLERS AND WE WORK CONTINUOUSLY TO HELP OUR CUSTOMERS BENEFIT FROM OUR VIDEO SURVEILLANCE TECHNOLOGY. FROM PRODUCT INSTALLATION QUESTIONS, TROUBLESHOOTING, FIRMWARE UPGRADES WITH A DEDICATED TELEPHONE SUPPORT, GSS GUIDES YOU TO THE MOST APPROPRIATE SOLUTION.

www.gogss.com

INDOOR STATION

OUTDOOR STATION




IP-IC-VTH-5221 DW-S2 Wi-Fi Indoor Monitor • 7" TFT Capacitive touch screen, 1024x600 • H.264, IPC (800x480) Resolution • 6x Alarm integration, Two Way Talk • Micro SD card optional, max 32GB • Record & Snapshot(SD card needed) • Surface Installation • 7.89"x 5.37"x 0.87" • DC 12V, PoE802.3af)	IP-IC-VTO-2000A-C Video Module • Module Outdoor Station • 1.3MP CMOS H.264 Camera, Color Image • Angle of View, D:120° H:90°, 2.8mm Lens • 1 Relay out , 1 RS485, 1 Exit Button, 1 Feedback • Stainless steel panel, IP54,IK07   
--	---

OUTDOOR MODULAR STATION



IP-IC-VTO-2000A-B1 1 Button Module • 1 Button Module • Stainless steel panel • Surfaced or Flush Mounted • IP 54, IK07, DC12V/24V,Max 10W	IP-IC-VTO-2000A-B3 3 Button Module • 3 Button Module • Stainless steel panel • Surfaced or Flush Mounted • IP 54, IK07, DC12V/24V,Max 10W	IP-IC-VTO-2000A-R Mifare Card Module • Reader Module • Stainless steel panel • Surfaced or Flush Mounted • IP 54, IK07, DC12V/24V,Max 10W	IP-IC-VTO-2000A-K-V2 Keypad Module • Mechanical Button • Stainless Steel panel • Surfaced or Flush Mounted • IP 54, IK07, DC12V/24V,Max 10W
--	--	--	--

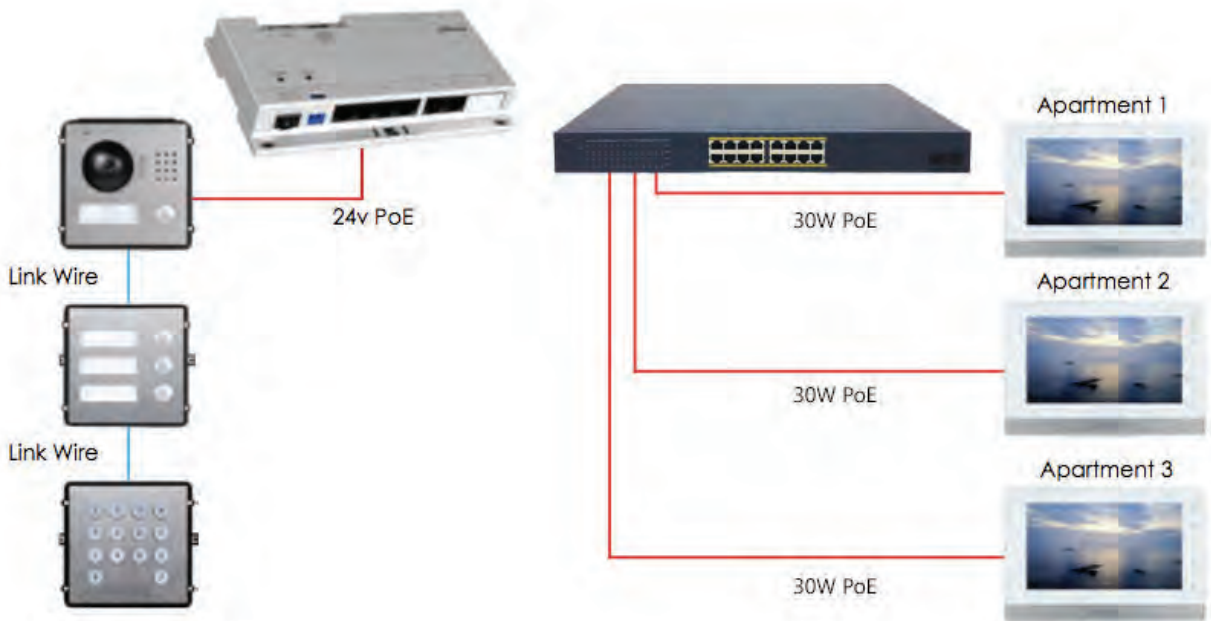

OUTDOOR STATION APARTMENTS



IP-IC-VTO-1210C-X	IP-IC-VTOB-110	IP-IC-VTOB-103
Apartment Outdoor Station • 1.3" 1.3MP CMOS (Color Image) • Angle of View D:95°, H: 75° • 3.6 mm Lens • Night vision & Voice indication • Local card opening • Video & Audio messaging • Aluminum panel, IP54, DC12V, Max 10W • Flush mounted or Surface mounted	Surface Mounted Box for IP-IC-VTO-1210C-X • Material: Aluminum • Size: 145mm*134mm*70mm • Weight: 1 Kg • Surface mounted box	Flush Mounted Box for IP-IC-VTO-1210C-X • Material: Plastic • Size: 126mm*389mm*71mm • Weight: 0.5 Kg • Flush mounted box

ACCESSORIES & PARTS

MIFARE CARDS



IP-IC-VTP2406	IP-IC-VTNS-1060A	IC CARD
• Intercom PoE Switch Power Supply • 24VDC, 1.5 ~ 3 Amp	Network PoE Switch for IP Intercom • Decent appearance • Protocol network power supply switch • Connect max 6 indoor monitors with the Cat 5e cable, transfer the signal and power together • DC24V, Max45W (Power Supply IP-IC-VTP2406)	• MIFARE S50 - 13.56 MHz • SIZE :10 cm • For IC readers



IP-IC-VTOB-108	IP-IC-VTOF-002	IP-IC-VTOB-113
Surface Mounted Box for VTO2000A • Material: Metal • Size: 145mm*134mm*88mm (5.71"x5.28"x3.46") • Weight: 1 Kg (2.20lb) • Surface mounted box	Front Panel for 2 Modules • Material:Stainless Steel • Size:257mm*145mm*11mm (10.2"x5.71"x0.43") • Weight:0.5kg (1.10lb) • Front Panel	Surface Mounted Box for 2 Modules • Material: Aluminum • Size: 261.4 mm*149.4 mm*80.6 mm (10.29"x5.88"x3.17") • Weight: 0.8 Kg (1.76lb) • Surface Mounted Box



IP-IC-VTOB-107	IP-IC-VTOF-003	IP-IC-VTOB-114
Flush Mounted Box for VTO-2000A • Material: Metal • Size: 125mm*135mm*56mm (4.92"x5.31"x2.20") • Weight: 0.8 Kg (1.76lb) • Flush mounted box	Front Panel for 3 Modules • Material:Stainless Steel • Size:369mm*145mm*11mm (14.53"x5.71"x0.43") • Weight:0.6kg (1.32lb) • Front Panel	Surface Mounted Box for 3 Modules • Material: Aluminum • Size:373.4mm*149.4mm*80.6mm (14.70"x5.88"x3.17") • Weight:0.9kg (1.98lb) • Surface Mounted Box

Rosslare Access Control



AC-215IP-BU	AC-225IP-BU	AC-425IP-BU	AC-825IP-U	ME-1515-U
Advanced SCALABLE NETWORK CTRLR, IN ME1015, TYPE B Power Control For 2 Reader • 30,000 cards. • 20,000 records (non-cyclic memory). • 2 inputs for reader (Wiegand) 26 bits. • Configurable for 1 or 2 doors. • 2 relays for opening the door. • 2 door status sensor inputs. • 2 auxiliary relays (programmable). • Built-in alarm speaker. • Removable screw terminals. • Communication • RS485 (use MD14). • TCP/IP.	Controller for 2 Readers, includes Cabinet in Black and Power Supply, Expand 2 more Readers with MD-D02B • 30,000 cards. • 20,000 records (non-cyclic memory). • Expandable with MD-IO84B I/O expansion for additional 8 inputs, 4 outputs OR the • MDD02B 2-Reader expansion for additional 2 • readers with 4 inputs, 4 outputs • Built-in alarm speaker. • Removable screw terminals. • Communication • RS485 (use MD14). • TCP/IP.	Controller for 4 Readers, includes Cabinet in Black and Power Supply, Expand 4 more Readers with MD-D04B • 30,000 cards. • 20,000 records (cyclic memory). • 2 inputs for reader (Wiegand) 26 bits. • Configurable for 2 or 4 doors. • 4 relays for opening the door. • Built-in alarm speaker. • Dismountable screw terminals. • Communication • RS485 (G-BUS). • TCP/IP.	6 Door Expandable Reader Scalable Networked Access Controller, Up to 56 Readers, Network Board, Up to 100,000 Users with D-805 • 60,000 cards. • 50,000 records (cyclic memory). • 2 inputs for reader (Wiegand) 26 bits. • Configurable up to 56 doors. • Supports up to 6 doors (Wiegand format/OSDP • readers), each with 2 inputs and 1 output. • 4 auxiliary inputs and 2 auxiliary outputs • 4 relays for opening the door. • 12 expansion boards via OSDP (R/S/D/P-805) • Built-in alarm speaker. • Dismountable screw terminals. • Communication • RS485 (G-BUS). • TCP/IP	Expansion Cabinet With Power For Up To 2 Of D-805 • Global input voltage – 100 to 240 VAC, 1.6 A. • 50/60Hz auto select. • Built-in power event generation to let the control • panels receive power supply and UPS events. • Built-in Rosslare LightBar™ for lighting the way • during maintenance and installation. • Full system hinge and key lock unit (including 2 • keys), thick high-quality oven baked black matte • coating.

Rosslare Expansion Card



MD-D02B	MD-D04B	D-805
2-Reader Expansion Module For Ac-225x-B Ctrl Panel • Additional two proximity readers or keypads • Four relay outputs and four supervised inputs to the access control panel • Wiegand or Clock-and-Data transmission keypad or biometric reader compatibility • LED status feedback for 12 V power and relay activation • Cost effective and modular installation • Input and output configurability using • Rosslare's AxTraxNG™ software	4-Reader Expansion Module for AC-425x-B Networked Access Control Panels • Additional four proximity readers or keypads • Four relay outputs and four supervised inputs to the access control panel • Wiegand or Clock-and-Data transmission keypad or biometric reader compatibility • LED status feedback for 12 V power and relay activation • Cost effective and modular installation • Input and output configurability using • Rosslare's AxTraxNG™ software	Controller Expansion Board -4-Door - For AC-825IP • The expandable board increases the • flexibility of the system of the access control • giving it an increase of 4 lectors, 4 • relate/ports, and 8 inputs supervised by the • panel.

Rosslare Card Readers



AY-K12C	AY-Q12C	AC-G44	AC-Q42HB
Mullion Wiegand Proximity Reader - 125 kHz - Indoor / Outdoor • Selectable output formats: Wiegand 26-Bit, RS-232, or Clock & Data • Excellent RFID card read range: 8 cm (3.2in.) to 10 cm (3.9 in.) • Wide range operating voltage: 5 to 16 VDC • 45 cm (18 in.) pigtail cable • Internal sounder with external control option • Tri-color LED with external control inputs • External reader hold control • Optical wall tamper detection • Water-resistant with epoxy potting (IP65)	Wiegand Proximity Reader - 125kHz - Indoor / Outdoor • Selectable output formats: Wiegand 26-Bit, RS-232, or Clock & Data • Excellent RFID card read range: 8 cm (3.2in.) to 10 cm (3.9 in.) • Wide range operating voltage: 5 to 16 VDC • 45 cm (18 in.) pigtail cable	This Durable Model Can Be Easily Programmed With Up To 500 Users, On A Single Door. • 500 Users • Code search feature for easy maintenance of user codes • Three user levels: Normal – Requires single PIN code or Proximity • card, Secure – Requires PIN code + Proximity card, Master User • Three access levels: Normal, Bypass, Secure • Internal buzzer • Powered either by transformer (AC) or regulated power supply (DC)	Anti-Vandal Backlit PIN & Proximity Standalone Controller • Built-in 125 kHz RFID card reader • 500 users can have PIN and / or RFID user credentials for granting access • Highly-visible blue backlit keypad • Smooth attractive design, with anti-vandal construction • Supports up to 8-digit PIN codes • 2 tri-colored LEDs and integral sounder for programming and operation

Rosslare Card Readers



AY-K35

ROSSLARE, AY-K35 MULTI-SMART READER (PROX CARD, NFC & BLE)

- Supports a wide range of Proximity Card Technologies (Credential Types)
- 125kHz EM, CSN, 125kHz HID, CSN
- 13.56 Mhz HID iClass, CSN, 13.56 Mhz Mifare, CSN, 13.56 Mhz Mifare
- Classic EV1, Sector, PicoPass ICode, CSN, FeliCa, CSN
- Supports Cellphone Entry*
- NFC, Bluetooth
- Small Compact Design
- 26-bit Wiegand data output
- Vandal-proof resistance IK09 rating
- IP68 suitable for indoor and outdoor use

Rosslare Card Reader Accessories



MP-K01

- Mounting Plate Spacer for AY-K12C



MP-K35


- Mounting Plate Spacer for AY-K35

Dnake Intercom



S617/S

- 8" Facial Recognition Android Door Station
- 8" color IPS LCD
- Dual HD cameras at 2MP resolution
- 120° wide viewing angle
- Support WDR technology to lighten the dark areas and darken the overexposed parts of the image
- Door entry methods: call, face, IC card (13.56MHz), ID card (125kHz), PIN code, APP, Bluetooth(optional)
- Anti-spoofing algorithm against photos and videos
- Support 20,000 users, 20,000 faces, and 60,000 cards
- Tamper alarm
- Support surface & flush mounting
- Easy integration with other SIP devices by SIP 2.0 protocol



902D-B6

- 10.1" Facial Recognition Android Door Phone
- 10.1-inch capacitive touch screen
- PoE or power adapter (DC12V/2A)
- Open the door by face recognition (10,000 users)
- Open the door by IC card (100,000 users)
- 2MP camera with WDR mode
- Support SIP 2.0 protocol
- Easy integration with elevator control system



S615/S

- 4.3" Facial Recognition Android Door Phone, CLOUD -BASED LICENSE AVAILABLE no indoor monitor require
- 4.3" color TFT LCD
- 3 output relays for door locks
- 120° wide-angle 2MP HD camera with automatic lighting
- Support WDR technology to lighten the dark areas and darken the overexposed parts of the image
- Door entry methods: call, face, IC card (13.56MHz), ID card (125kHz), PIN code, APP
- Anti-spoofing algorithm against photos and videos
- Support 20,000 users, 20,000 faces, and 60,000 cards
- Tamper alarm
- Support surface & flush mounting
- Easy integration with other SIP devices by SIP 2.0 protocol




C112A

- WIFI & Bluetooth Doorbell
- 1-button SIP Video Door Phone
- Compact design
- 2MP HD digital WDR camera
- 110° wide viewing angle
- Motion detection
- Tamper alarm
- Premium audio and video quality (H.265 codec)
- Optional Wi-Fi
- Door entry methods: call, IC card (13.56MHz), APP
- 3 integrated indicators
- Support 60,000 cards
- Low temperature resistance(-40℃ to 55℃)
- Easy integration with other SIP devices by SIP 2.0 protocol



DNAKE SMART Pro APP



Dnake Intercom



S215/S

- 4.3" SIP Video Door Phone
- 4.3" color TFT LCD
- Premium audio and video quality
- Aluminum panel
- 110° wide-angle 2MP HD camera with automatic lighting
- Door entry: call, face, IC card (13.56MHz), ID card (125kHz), PIN code, APP
- Support 20,000 users, and 60,000 cards
- Cold-resistant version (-40℃ to 55℃) available
- Quick to install and easy integration with IP telephone systems using SIP protocol support



S213K/S

- SIP Video Door Phone with Keypad
- Aluminum alloy panel
- 110° wide-angle 2MP HD camera with automatic lighting
- Door entry methods: call, IC card (13.56MHz), ID card(125kHz), PIN Code, APP
- Support 60,000 cards
- 3 integrated indicators
- IP65, IK08
- Tamper alarm
- Standard PoE (IEEE802.3af) / 12V DC
- Low temperature resistance(-40℃ to 55℃) Support surface & flush mounting
- Easy integration with other SIP devices by SIP 2.0 protocol



S213M-5/S

- Multi-button SIP Video Door Phone
- Aluminum alloy panel
- 110° wide-angle 2MP HD camera with automatic lighting
- 5 Multi-button with name plate supported
- Door entry methods: call, IC card (13.56MHz), ID card(125kHz), APP
- Support 60,000 cards
- 3 integrated indicators
- IP65 waterproof & dustproof
- Tamper alarm
- Standard PoE (IEEE802.3af) / 12V DC
- Low temperature resistance(-40℃ to 55℃)
- Support surface & flush mounting
- Easy integration with other SIP devices by SIP 2.0 protocol



S213M-2/S

- Multi-button SIP Video Door Phone
- Aluminum alloy panel
- 110° wide-angle 2MP HD camera with automatic lighting
- Multi-button with name plate supported (2 buttons optional)
- Door entry methods: call, IC card (13.56MHz), ID card(125kHz), APP
- Support 60,000 cards
- 3 integrated indicators
- IP65, IK08
- Tamper alarm
- Standard PoE (IEEE802.3af) / 12V DC
- Low temperature resistance(-40℃ to 55℃)
- Support surface & flush mounting
- Easy integration with other SIP devices by SIP 2.0 protocol

Dnake Intercom

Dnake Indoor Monitors






S212/S	E216	E416W	A416W	H618W
1-button SIP Video Door Phone - Aluminum alloy panel 110° wide-angle 2MP HD camera with automatic lighting - Door entry methods: call, IC card (13.56MHz), ID card(125kHz), APP - Support 60,000 cards 3 integrated indicators - IP65 certified - Tamper alarm - Standard PoE (IEEE802.3af) / 12V DC - Low temperature resistance(-40 to 55) - Support surface & flush mounting - Easy integration with other SIP devices by SIP 2.0 protocol	7" Linux-based Indoor Monitor 7" capacitive touch screen, 1024 x 600 - Video monitoring of DNAKE IP intercoms & IPC - HD quality audio and video communication 8-ch alarm input, 1 x RS485 - Powered by PoE or power adapter (DC12V/2A) - Support surface & desktop mounting - User-friendly user interface, easy to understand - Quick installation and remote management via web interface - Easy integration with elevator control system	Excellent performance with Android 10 OS 7" capacitive touch screen, 1024 x 600 - Support monitoring 16 IP cameras - HD quality audio and video communication 8-ch alarm input, 1 x RS485 - Powered by PoE or power adapter (DC12V/2A) 802.11b/g/n Wi-Fi optional - Support surface & desktop mounting - Quick installation and remote management via web interface - Easy home automation integration through 3rd-party apps	7" Android 10 Indoor Monitor - Excellent performance with Android 10 OS 7" IPS capacitive touch screen, 1024 x 600 - Support monitoring 16 IP cameras - HD quality audio and video communication 8-ch alarm input, 1 x RS485 - Powered by PoE or power adapter (DC12V/2A) 802.11b/g/n Wi-Fi and 2MP camera optional - Support surface & desktop mounting - Quick installation and remote management via web interface - Easy home automation integration through 3rd-party apps	10.1" Android 10 Indoor Monitor - Excellent performance with Android 10 OS 2GB RAM, 8 GB ROM 10.1" IPS capacitive touch screen, 1280 x 800 - Aluminum front panel - Support monitoring 16 IP cameras - Powered by PoE or power adapter (DC12V/2A) 802.11b/g/n Wi-Fi and 2MP camera optional - Wake up screen automatically when someone comes close - Surface or desktop mounting - Easy integration with other SIP devices by SIP 2.0 protocol - Compatible with other smart home devices through 3rd-party apps

Dnake Accessories



RH01	RH03	SMX07	DS06	290A-8	290AB-8
Rain hood for S212 & S213 Rain hood for DNAKE door station S212 & S213 (surface mounting)	Rain hood for S215 & S615 Rain hood for DNAKE door station S215 & S615 (surface mounting)	- Surface mounting for S617/S - Dimension: 299 x 139 x 34.2 mm - Color: Black	- DNAKE Desktop Stand - Desk stand for DNAKE indoor monitor - A416/E416/E216 - Material: Steel Plate Cold Commercial (SPCC) - Working Temperature: -10° to +55° C - Working Humidity: 10% to 90%	2-wire Distributor 2 cascade interfaces for 2level cascade - Connect maximum 8 indoors monitors - network connection trough RJ45 port	2-wire Distributor 2 cascade interfaces for 2level cascade - Connect maximum 8 indoors monitors

8" Facial Recognition Android Door Station



Expansion Card



Door Strike



Exit Button



AC-RL-MDD-02	AC-DS2200-S	AC-EB TOUCHLESS	AC-EB43L
ROSSLARE 2 Reader Expansion • 2 Multi-format readers ports • 4 Supervised, 4 state, dual EOL input • 4 fully-programmable, 5 A Form-C relay output • Optional expansion for AC-225(IP) • UL Listed	• Heavy Duty 2200lbs ANSI Door Strike • Door status Output, NO/NC • DC12V or DC24V	• Small Stainless Steel infrared luminous touchless Exit button • NO/NC/COM • 12VDC/ 24VDC 3amps	• Small Stainless Steel Exit button • NO/NC/COM • 12VDC/ 24VDC 3amps


Accessories

New Item




AC-EB30L	AC100-Y3	IC CARD	ID CARD	AC KF-G 125KH _z
• Exit Button, NO-COM • Silver • 83 x 32 x 25 (mm) • Voltage : 36VDC	• Mifare 1 Contactless Smart card • Frequency: 13.56MHz • Designed with the PVC and AB glue • Available Colors: Yellow, Red, Grey, Blue	• Mifare 1 13.56MHz Card	• ISO Proximity card (86*54*0.8mm), 125KHz	• KEYFOB Proximity 125KHz • Available Colors: Grey

Maglocks 1200, 600 lbs




AC-UEM500	LK-M12L	LK-M06L	LA-L12	LA-Z12
• Magnetic Lock With Led Indicator And Lock Status, 1200lbs	• Rosslare magnetic lock with led indicator and lock status, 1200lbs • 12/24 VDC input voltage • UL Listed	• Rosslare magnetic lock with led indicator and lock status, 600lbs • 12/24 VDC input voltage • UL Listed	• Access control electromagnetic lock bracket, adjustable, I shape, 10.5" length x 1.5" width x 3" depth, for LK-M12L lock	• Access control electromagnetic lock bracket, z shape, 7.3" length x 2.5" width x 2.5" depth, for LK-M12L glass door lock


Diagram:

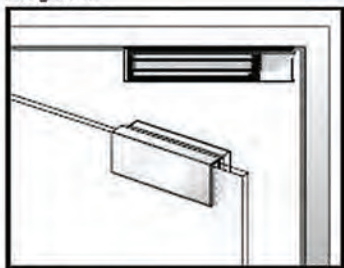


U-bracket for glass door without frame



Regular installation

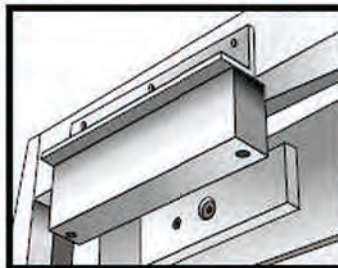

L-bracket for narrow door frame

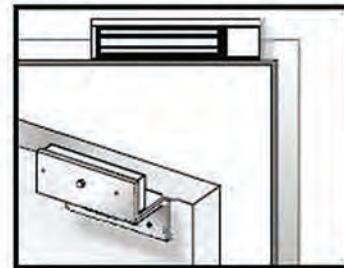

LZ-bracket for inswing door

4 IN 1 HD CAMERAS



MODEL NUMBER	HDC-MBI2402M-3.6	HDC-DI3A02/5M-2812 B/W	WAC348-FD/F 2.8	WAC348-FD/FU 2.8
Price				
Featuring				
Image Sensor	1/2.8" 2.4MP CMOS	1/2.5" 5MP CMOS	1/2.8" Sony CMOS sensor	1/2.8" Sony CMOS sensor
Lens	3.6mm Fixed Lens	2.8~12mm Vari-Focals Lens	2.8mm Fixed lens	2.8mm Fixed lens
Wide Dynamic Range	D-WDR	D WDR	120dB-WDR	120dB-WDR
Max. IR Distance	20m (68fts)	LED 3 IR, Max IR 30m (98fts)	2 LED Warm Light & IR : Max 25m(82fts)	2 LED Warm Light & IR : Max 25m(82fts)
Max. Resolution & Frame Rate	2MP 1920 × 1080@30 fps	5MP 2592 × 1944@20 fps	8MP 3840x2160@ 15fps	8MP 3840x2160@ 15fps
Audio In/Out	-	-	-	Built in Mic
Protection	IP67	IP67	IP67	IP67
Video Output	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS	HDCVI / AHD/ TVI/ CVBS
Power	12VDC	12VDC	12VDC	12VDC
Optional Brackets	 B2-W	 B1-W/G Junction Box B1-2-W	 B1-XD W Junction Box	 B1-XD W Junction Box
		 Z1-W/G E1-W/G P1-W/G P2-W/G P3-W/G B1-1-W/G B7-W/G		

4 IN 1 HD CAMERAS



MODEL NUMBER	HDC-VD105E-IR-VF	DS-2CE16D9T-AIRAZH (05-50MM)	HDC-LP4A/2M-Z
Price			
Featuring			
Image Sensor	1/2.5" 5.0 Megapixel CMOS	2MP CMOS Image Sensor	1.3" 2.4 MP High Performance CMOS
Lens	2.8~12mm Vari-Focals Lens	05 ~ 50 mm Motorized lens, Auto focus	6~22mm Motorized Vari-Focals Lens
Wide Dynamic Range	D-WDR	120dB WDR	120dB WDR
Max. IR Distance	IR Led: 35pcs,Max IR: 35m(114ft)	IR range up to 120m (393ft) 0.003Lux/F1.3, 30IRE, 0Lux IR on	IR Led: 21.3X2 super IR+2 super white light
Max. Resolution & Frame Rate	5MP@20fps	2.1MP 1944 x 1092@30fps	2MP 1920 x 1080p
Audio In/Out	-	-	-
Protection	IP66 / Vandal Proof	IP67	IP66 / Vandal Proof
Video Output	TVI/CVI/AHD/CVBS	TVI, CVBS	TVI/CVI/AHD/CVBS
Power	12VDC	12VDC	12VDC
Optional Brackets	 J-30 + B1-3-W B3-W E1-W Z1-W P1-W P2-W P3-W	 1280ZJ-S Junction Box 1275ZJ Pole Mount 1276ZJ Corner Mount	 W-CMH-B

4 IN1 HD COVERT CAMERAS

Smoke Detector
Style Camera



Pin Hole
Camera



Motion Detection
Style Camera



2MP Elevator
Camera



Models	HDC-SM2M-3.7	HDC-PH/2M-3.7	HDC-PIR/2M-IR-3.7	HDC-EV/2M-2.8
Price				
Featuring	2MP 4IN1	2MP 4IN1	2MP 4IN1	2MP 4IN1
Image Sensor	1.2.8" 2.4 MP CMOS	1.2.8" 2.4 MP CMOS	1/2.8" 2 MP CMOS	1/2.8" 2 MP CMOS
Lens	3.7mm Fixed Lens	3.7mm Fixed Lens	3.7mm Fixed Lens	2.8mm Fixed Lens
Wide Dynamic Range	D-WDR	D-WDR	D-WDR	D-WDR
Max. IR Distance	N/A	N/A	12pcs IR Leds, IR distance 10-15 meters	-
Max. Resolution	1920 x 1080p	1920 x 1080p	1920 x 1080p	1920 x 1080p
Max FrameRate	2MP@30fps	2MP@30fps	2MP@30fps	2MP@30fps
Protection	-	-	-	-
Power	12VDC	12VDC	12VDC	12VDC
Video Output	TVI/CVI/AHD/CVBS	TVI/CVI/AHD/CVBS	TVI/CVI/AHD/CVBS	TVI/CVI/AHD/CVBS

4 IN1 HD COVERT CAMERAS

NETWORK COVERT CAMERAS

5MP Elevator
Camera



5MP Motion Detection
Style Camera



6MP Elevator
Camera



Models	HCD-EV/105M-2.8	WNC2015-PIR 3.7MM	WNC2016-EV 2.8MM
Price			
Featuring	5MP 4IN1	5MP Lightning Protection Onvif P2P	6MP Lightning Protection Onvif P2P
Image Sensor	1/2.5" 5MP CMOS sensor	1.3" 5 MP CMOS sensor	1/2.8" 6 MP Sony CMOS sensor
Lens	2.8mm Fixed lens	3.7mm Fixed Lens	2.8mm Fixed Lens
Wide Dynamic Range	D-WDR	D-WDR	D-WDR
Max. IR Distance	-	12pcs IR Leds, IR distance 10-15 meters	1pc IR Leds, IR distance 5-6 meters
Max FrameRate	5MP 2592 x 1944@20fps	5MP 2592 x 1944@30fps	6MP 3072 x 2048@25fps
Audio In/Out	-	-	-
Protection	-	Lightning protection 4000V	Lightning protection 4000V
Power	12VDC	12VDC, PoE	12VDC, PoE
Video Output	TVI/CVI/AHD/CVBS	Network Camera	Network Camera
Color	Brushed Aluminum	White	Brushed Aluminum
Star Features	-	Human body detection, Vehicle detection, , P2P Cloud service	Human body detection, , P2P Cloud service



NETWORK COLOR DAY & NIGHT CAMERAS



Models	WNC4118-XD/LIU 2.8MM	WNC4018-XDSL W 2.8MM	WNC4018-XD/LIU-5X
Price			
Featuring			
Image Sensor	1/2.7" High sensitivity CMOS	1/2.8" Sony CMOS sensor	1/2.8" Sony CMOS sensor
Lens	2.8mm Fixed lens	2.8mm Fixed lens	2.7-13.5 mm Auto Focal + 5x optical zoom PTZ
PTZ	-	-	Pan: 0° ~ 280°; Tilt: 0° ~ 90°
Wide Dynamic Range	D-WDR	D-WDR	D-WDR
Max. IR Distance	IR 25m(82fts) / Warm light 20m(82fts)	2 LED Warm Light, Max 30m(98fts)	4pcs array IR&warm Led, 40 m (IR), 30 m (warm light)
Max FrameRate	8MP 3840x2160@ 20fps	8MP 3840x2160@ 20fps	8MP 3840x2160@ 20fps
Audio In/Out	Built in Mic	Built in Mic	Built in Mic
Protection	IP67	IP67	IP67
Power	12VDC, PoE	12VDC, PoE	12VDC, PoE
Memory Slot	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 256GB	Built-in micro SD Slot, Max up to 512GB
Star Features	Human body detection, Vehicle detection, P2P	Human body detection, Vehicle detection, P2P	Human body detection, Vehicle detection, P2P, Reset Key
Optional Brackets			



Brackets & Housings

				
W-CMH-B	W-H7001	W-H7004HB	B1-XD-W/B	B1-W/G
Outdoor Heavy-Duty Bracket	Outdoor Heavy-Duty Housing with Bracket sets	Outdoor Heavy-Duty Housing with Bracket Built-in Heater & Blower	Big Turret Camera Base For Cable Management Size 5.07in NC3XX-XD/G, AC3XX-FD4/G, NC2XX-XD/G	Big Dome Camera Base For Cable Management Size 4.75in For: DI3A(02) EB105-VF Dark Grey Or White

				
B2-W/G	B1-1 W/G	B3-W	J-30-W	B1-3-W
Small Dome Camera Base For Cable Manag Size 3.75in for: DI24A, EB105M Dark Grey or White	Junction Box- Supported AC3xx-VD4Z White Works with B1-W/G, P1/2/3-W/G	Junction box- Supported HDC-VD105E-IR-VF, White Works with P1/2/3-W/G	Universal Metal Wall Mount Bracket (must use with B1-3-W)	Metal plate for J-30W Cable Manag Size 6.05 Inch Plate Works with B1-W/G

					
B2-2-W	B1-2-W	P1 W / G	P2 W / G	P3 W / G	E1 W/G
Small Eyeball Camera Base For Cable Manag Size 3.75 Inch Plate Works with B2-W/G	Small Eyeball Camera Base For Cable Manag Size 4.75 inch Plate	Bracket Extension in 310mm(12.20 in) Works with B1-1 W/G, B3-W	Bracket Extension in 180mm(7.08 in) Works with B1-1 W/G, B3-W	Bracket Extension in 100mm(3.94 in) Works with B1-1 W/G	Bracket Extension(1 Male & 1 Female) in 310mm(12.20 in)

				
Z1 W/G	B7 W/G	W-CB01-W	W-B18	W-B19
Conduit Adapter	Big Dome (eyeball) Camera Wall Mount For: DI3A(02) EB105-VF Dark Grey or White	Bracket for NC324-CU, NC326-CU	Universal Camera Pole Bracket & Straps	Universal Camera Corner Bracket

PROBE
Wireless Access Point



Call for more Information

Access Point	Outdoor PoE Switch	Wall Bracket
--------------	--------------------	--------------



PB-AP150-1	PB-AP300-5	PB-POE5P48W	PB-APB03
1.2 MILES RANGE 150MBPS ACCESS POINT	3 MILES RANGE 300MBPS ACCESS POINT	OUTDOOR 4 +1 PORT POE SWITCH	Specification
• TRANSMISSION RANGE -2km (1.2 MILES) • FREQUENCY -5.8ghz • WIRELESS SPEED -150mbps • TRANSMITTING POWER -25dbm • ANTENNA GAIN -12db • ANTENNA DIRECTION -vertical • VOLTAGE 24vdc, 1amp • POE POWER IEEE802.11a/100Mbps • TOTAL BANDWIDTH: 20-60M • 2 Lan Ports • Waterproof IP65 • Point to Point • Point to Multiple Point (up to 4 slaves)	• TRANSMISSION RANGE -5km (3 MILES) • FREQUENCY -5.8ghz • WIRELESS SPEED -300mbps • TRANSMITTING POWER -27dbm • ANTENNA GAIN -18db • ANTENNA DIRECTION -vertical & horizontal • VOLTAGE 24vdc, 1amp • POE POWER IEEE802.11a/n/u 100Mbps • TOTAL BANDWIDTH: 40-62M • 2 Lan Ports • Waterproof IP65 • Point to Point • Point to Multiple Point (up to 4 slaves)	• BUILT-IN 4 POE PORT: 4x10/100M Ethernet Ports (PoE) + 1x10/100M Uplink Port • POWER SUPPLY: 4 Ports IEEE802.3af/at • VOLTAGE 48dc • TOTAL BANDWIDTH: 40-62M • 1 Lan Ports • Waterproof, IP65, Anti UV Shell, Lightning protection circuit • Operation Temperature -4°F ~140°F	• Material Iron (white sandblasted surface) • Size 208*185MM • Weight 0.5kg • Required for PB-AP300-5

POE Switches, Extenders & Splitters



TP LINK



P-SFP-GE-T RJ45

- 1000BASE-T SFP Copper Transceiver Hot Pluggable, 1000Mb/s, Cat-5 UTP Cable, 100m
- Up to 1.25Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Operating temperature range: 0°C to 70°C / -40°C to +85°C
- Fully metallic enclosure for low EMI
- Low power dissipation
- Compact RJ-45 connector assembly
- Detailed product information in EEPROM
- +3.3V single power supply

UVA-SW-5P-G

- 5-Port 10/100/1000Mbps Desktop Switch
- Plug and play, no configuration needed
- Supports 802.1p/DSCP QoS and IGMP Snooping functions
- Durable metal casing, desktop/ wall-mounting options, and a fanless design
- IEEE 802.3x flow control provides reliable data transfer
- Green Ethernet technology reduces power consumption

POE-EX01A

- POE Extender
- Complies with IEEE 802.3af Power over Ethernet
- Extends the range of PoE an additional 100 meters (328ft.)
- Forwards both Ethernet data + PoE power to remote devices
- Plug & Play

POE-1CH-30W

- 1 Port POE Plus Injector
- Reduced installation cost
- Fully IEEE802.3at compliant
- 10/100/1000 Mbps supported
- Plug & play. No configuration required
- Total Output 30 watts

POE-1CH-60W

- 1 Port POE Plus Injector
- Reduced installation cost
- Fully IEEE802.3at compliant
- 10/100/1000 Mbps supported
- Plug & play. No configuration required
- Total Output 60 watts

Gigabit



POE-SP102

- 2 Channel High power PoE Splitter / Repeater
- Reduced Installation cost
- Fully IEEE802.3af/at(G) compliant
- 10/100 Mbps supported
- Lighting-proof and Compact design
- Plug & Play. No configuration required

POE-SW4P-2G-65

- 6 Ports (4 POE) Network Switch
- Supports IEEE802.3, IEEE802.3u and IEEE802.3X standards
- MAC auto learning, aging, MAC address
- capacity is 2K
- Supports MDI/MDIX self-adaptation
- RJ45 port supports 10/100 Mbps self-adaptation
- Supports IEEE802.3af and IEEE803.3at power supply standards
- Adopts metal enclosure
- Supports Hi-PoE 65W, Max 820fts, Supports DC 48-57V power supply

POE-SW8P-2G-96

- 10 Ports (8 POE) Network Switch
- Supports IEEE802.3, IEEE802.3u and IEEE802.3X standards
- MAC auto learning, aging, MAC address
- capacity is 2K
- Supports MDI/MDIX self-adaptation
- RJ45 port supports 10/100 Mbps self-adaptation
- Supports IEEE802.3af and IEEE803.3at power supply standards
- Adopts metal enclosure
- Supports Hi-PoE 96W, Max 820fts, Supports DC 48-57V power supply

POE-SW16P-2G-150

- 16 ports + 2 ports RJ45/ 1 SFP port Supports PoE, PoE+, and Hi-PoE (use with PFT1300 PoE Extender)
- 150 W PoE budget**
- 250 m (820ft) long distance PoE transmission**
- PoE management, PoE Setting/Event Statistics/ Green PoE
- Search and upgrade via ConfigTool
- Support Web management
- High lightning protection design
- Non-blocking video transmission

All Ports Gigabit

2 Fiber Ports



All Ports Gigabit

2 Fiber Ports



2 Fiber Ports



POE-SW16PG-2GF-250

- 16 ports Gigabit **PoE Plus** + 2 SFP port Gigabyte UpLink
- Support PoE power up to 15.4W/30W for each PoE ports
- 250 W PoE budget**
- 250 m (820ft) long distance PoE transmission**
- MAC address 8K**
- 10/100/1000Mbps Supported
- Fully IEEE802.3af/at standard compliant
- Support PoE power up to 15.4W/30W for each PoE ports

POE-SW24PG-2GF-250

- 24 ports Gigabit **PoE Plus** + 2 SFP port Gigabyte UpLink
- Support PoE power up to 15.4W/30W for each PoE ports
- 250 W PoE budget**
- 250 m (820ft) long distance PoE transmission**
- MAC address 8K**
- 10/100/1000Mbps Supported
- Fully IEEE802.3af/at standard compliant
- Support PoE power up to 15.4W/30W for each PoE ports

POE-SW24P-2G-440

- 26 ports (24 / 100Mbps Unmanaged PoE Switch)
- IEEE 802.3at and IEEE 802.3af Power over Ethernet (PoE) compliant
- 24x10/100Mbps Auto-MDIX PoE ports
- Provides up to 30 watts per PoE port
- 370 W PoE budget**
- 4 KV surge protection for PoE ports
- Plug-and-play installation
- 8.8 Gbps switching fabric
- 2.75 Mbits RAM Data Buffer
- 4K MAC address entries
- Sturdy metal enclosure

About GSS Switches & PoE Extenders

GSS offers an array of video switches field tested for longevity and performance. Our source specializes in R&D, production, sales & service of PoE switches, Ethernet extenders, PoE media converters, etc. With technical support and repair in New York, the factory has branch offices in Beijing, Shanghai, Chengdu & Wuhan to serve domestic customers & world-wide clients. Within the last year, the products have been well received in various networking environments including government, public security, financial security, transportation, schools, & more. Our manufacturer was granted a patent award for their product technology innovations as well as other international certifications. The factory is also ISO9001 certified which enables GSS to offer high quality products to meet your diversified requirements.

DC PTC Circuit Breaker Power Supplies



W-12VDC-8P/4A

12VDC/4Amps 8 PTC
OUTPUT CCTV
Distributed
Power Supply



W-12VDC-4P/5A

12VDC/5Amps 4 PTC
OUTPUT CCTV
Distributed
Power Supply

New Item



W-12VDC-9P/5A

12VDC/5Amps 9 PTC
OUTPUT CCTV
Distributed
Power Supply



Weather Proof

W-12VDC-9P/10AWP

12VDC/10Amps 9 PTC
OUTPUT CCTV
Distributed Power Supply
Water Resistant



W-12VDC-18P/25A

12VDC/25Amps 18 PTC
Output 12VDC,
Distributed
Power Supply

New Item



W-12VDC-18P/30A

Input 110/120 VAC
Output 12VDC,
18channels 30 Amp
Power Supply

UL Listed DC PTC Circuit Breaker Power Supplies



W-UL12VDC4P/5A

12VDC/5Amps 4 PTC OUTPUT CCTV
Distributed
Power Supply
<UL LISTED>



W-UL12VDC9P/5A

12VDC/5Amps 9 PTC OUTPUT CCTV
Distributed
Power Supply
<UL LISTED>



W-UL12VDC9P/10A

12VDC/10Amps 9 PTC OUTPUT CCTV
Distributed
Power Supply
<UL LISTED>

UL Listed DC PTC Circuit Breaker Power Supplies



W-UL12VDC18P/10A

12VDC/10Amps 18 PORTS OUTPUT CCTV
Distributed
Power Supply
<UL LISTED>

New Item



W-12VDC-18P/20A UL

12VDC/20Amps 18 PORTS OUTPUT CCTV
Distributed
Power Supply
<UL LISTED>

New Item



W-12VDC-18P/30A UL

12VDC/30Amps 18 PORTS OUTPUT CCTV
Distributed
• Short Circuit Protection Output is Shut Down &
Automatic Restart
Power Supply
<UL LISTED>

Coming Soon

UL Listed Power Supplies



W-12VDC-16P20A-RM UL

12VDC/20Amps Rack Mount
 • 16 PTC OUTPUT Distributed
 • Short Circuit Protection Output is Shut Down &
 Automatic Restart
 Power Supply
 <UL LISTED>



W-12VDC-8P13A-4K UL

12Vdc,13Amps = 1.625A per Channel Distributed
 4K/8M DC Power Box (noise-free 4K video image)
 Power Supply
 <UL LISTED>



W-12VDC-16P20A-4K UL

12Vdc,20Amps = 1.25A per Channel Distributed
 4K/8M DC Power Box (noise-free 4K video image)
 Power Supply
 <UL LISTED>

AC PTC Circuit Breaker Power Supplies



W-24VAC9P/2.5A

24VAC/2.5Amps 9 PTC OUTPUT CCTV
 Distributed
 Power Supply



W-24VAC9P/5A

24VAC/5 Amps 9 PTC OUTPUT CCTV
 Distributed
 Power Supply



W-24VAC-18P/10A

24VAC/5Amps 18 PTC OUTPUT CCTV
 Distributed
 Power Supply

AC to DC Converter.



W-24AC/12DC

STEP DOWN TRANSFORMER
 INPUT: AC16V-28V DC16V-40V
 OUTPUT: DC12V -1.5A

UL Listed AC Power Adapters



CP-112450 (2500mA)

24V AC 50VA Transformer
 <UL LISTED>



CP-112460 (3000mA)

24V AC 60VA Transformer
 <UL LISTED>



CP1105

12VDC-500Amp/UL
 <UL LISTED>

UL Listed DC Power Adapters



W-T1000

12VDC-1Amp/UL
 <UL LISTED>



W-T2000

12VDC-2Amp/UL
 <UL LISTED>



W-T5000

12VDC-5Amp/UL
 <UL LISTED>



W-12VDC-SA4P5A UL

12VDC- 4 CHANNEL OUTPUT 4 Amps.
 <UL LISTED>

Power Strip With Surge Protection



TR 3 OUTLET-778

- 3 Outlet power strip
- Heavy duty surge protector
- AC-125 V
- 14 AWG cord
- 15 AMPS

<UL LISTED>



TR 6 OUTLET-7898AA-6

- 6 Outlet power strip
- Heavy duty surge protector
- 6 foot long cord
- AC-125 V
- 14 AWG cord
- 15 AMPS

<UL LISTED>



TR 6 OUTLET-12FT

- 6 Outlet power strip
- Heavy duty surge protector
- 12 foot long cord
- AC-125 V
- 14 AWG cord
- 15 AMPS

<UL LISTED>

Extension Cord



PT-3815

- Heavy Duty UL Orange Indoor/Outdoor Extension Cord
- 15 foot long cord
- 13 AMPS, 16AWG3, 125V

<UL LISTED>



PT-3825

- Heavy Duty UL Orange Indoor/Outdoor Extension Cord
- 25 foot long cord
- 13 AMPS, 16AWG3, 125V

<UL LISTED>

Mixed Copper Siamese Cable ETL / UL Listed



W-95S/500

500ft Siamese
Cable-0.81MM 20AWG CCS/3.66MM fpe
6.1MM PVC/18AWG CCA/4.0
ETL Listed
Available Colors: PVC-White or Black Color



W-95S/1000

1000ft Siamese
Cable-0.81MM 20AWG CCS/3.66MM fpe
6.1MM PVC/18AWG CCA/4.0
ETL Listed
Available Colors: PVC-White or Black Color



W-90S/500

500Ft Siamese 95%
Cable-0.81MM 20AWG BC/3.66MM fpe
95% COVERAGE/6.1MM PVC/18AWG
4xBC/3xCCA /4.0 PVC-White or Black Color
ETL Listed



W-90S/1000

1000ft Siamese 95%
Cable-0.81MM 20AWG BC/3.66MM fpe
95% COVERAGE/6.1MM PVC/18AWG
4xBC/3xCCA
4.0 PVC-White/Black Color
ETL Listed



Mixed Copper Cat5e ETL / UL Listed



W-CAT5E/CCA

1000ft CCA UTP Cable, 24 AWG, 4 Twisted Pair,
Unshielded, Cat5e
UL/ETL Listed
Available Colors: PVC-White, Blue Color



CAT5E-CCU-1000

1000ft CCU UTP Cable/CMR 24 AWG, 4
Twisted Pair, Unshielded, Cat5e
UL/ETL Listed
Available Colors: PVC- Black, Orange,
Yellow Colors



Full Copper Cat5e ETL / UL Listed



C5EBC1000UL-CMR

1000ft CCU UTP Cable/CMR 24 AWG, 4
Twisted Pair, Unshielded, Cat5e
UL/ETL Listed
Available Colors: PVC-White, Black, Blue, Yellow
Colors



W-CAT5E/CMP/CCU/1000

CAT5E/CMP/ UTP PLENUM NETWORK CABLE-
Unshielded 4 Twisted Pairs, 24AWG, 350MHZ,
UL & ETL Listed. 1000FT Bare Copper, Available
Colors: PVC-White, Black



Mixed Copper CAT6 ETL / UL Listed

Full Copper CAT6 ETL / UL Listed



W-CAT6/CCA/WHITE

1000ft CCA UTP Cable,
23 AWG, 4 Twisted Pair, Unshielded, Cat6
UL/ETL Listed
Available Colors: PVC-White Color



C6BC1000UL-CMR

1000ft CCU UTP Cable, UL Listed 550MHz
Full Copper Cat6 Riser (CMR) RIB /
PULLBOX Cable, Unshielded Twisted Pair
23AWG, 4 Pairs, Available Colors: PVC-
White, Black, Blue, Yellow Colors



C6BC1000UL-CMP

Cat6 PLENUM Cable 1000ft, CMP
PVC- 23AWG 4PR 550MHZ - WHITE - RIB /
PULLBOX UL Listed



C6BC1000-OD-BK

1000ft CCU UTP Cable, 23 AWG, 550Mhz, 4
Twisted Pair, Unshielded, Cat6
UL/ETL Listed
Outdoor Rated
Available Colors: PVC-Black Color



Full Copper Cat6 ETL / UL Listed



C6BC1000-DB-BK

1000ft CCU UTP Cable, 23 AWG, 550Mhz, 4 Twisted
Pair, Unshielded, Cat6
UL/ETL Listed
Direct Burial
Available Colors: PVC-Black Color



6E04UR3N**

Cat6 PLENUM Cable 1000ft, CATEGORY 6
600MHz UTP RISER (CMR) 23/4 UNSHIELDED
FT4 CABLE Listed White, Blue Colors



6E04UP3N**

Cat6 PLENUM Cable 1000ft, CATEGORY
6 600MHz UTP PLENUM (CMP) 23/4
UNSHIELDED FT6 CABLE Listed White, Blue,
Yellow, Purple Colors



6A04UPWH2-UL

CAT 6A UTP 10G RISER (CMR)
23/4 UNSHIELDED FT4 CABLE
White Color



Control Cables



W-A2/18/500W

18 AWG
Power wire/500 ft




A2204S500-CMR-UL

UL listed Solid Bare Alarm
Cable 22AWG 4 Conductors-
500FT



A2204S1000-CMR-UL

UL listed Solid Bare Alarm
Cable 22AWG 4 Conductors-
1000FT



A2204T500-CMR-UL

Alarm Cable 22AWG 4
conductors Stranded b
500FT



A2204T1000-CMR-UL

Alarm Cable 22AWG 4
conductors Stranded b
1000FT



W-SPK16/2-500

Speaker Wire
16AWG/2
500ft



Premade Cables



COAX PATCH CABLE

W-V3B 3ft RG59/u Coaxial Patch Cable - BNC-BLACK
W-V5B 5ft RG59/u Coaxial Patch Cable - BNC..BLACK
W-V10B 10ft RG59/u Coaxial Patch Cable-BNC..BLACK

PREMADE HD-CVI, HD-TVI ,HD-AHD, SIAMESE CABLE

W-VP25HD/W-V2-25ft White
W-VP25HD/B-V2-25ft Black
W-VP50HD/W-V2-50ft White
W-VP50HD/B-V2-50ft Black

W-VP100HD/W-V2-100ft White
W-VP100HD/B-V2-100ft White
W-VP150HD/W-V2-150ft White
W-VP150HD/B-V2-150ft Black

HDMI & Network Patch Cables



HDMI-19 PIN 4K PLUG CABLES

W-HD0402-1FT HDMI V1.4 HDMI-plug 19 pin,
1 feet **Support 4K output**
W-HD0402-3FT HDMI V1.4 HDMI-plug 19 pin,
3 feet **Support 4K output**
W-HD0402-6FT HDMI V1.4 HDMI-plug 19 pin,
6 feet **Support 4K output**
W-HD0402-10FT HDMI V1.4 HDMI-plug
19 pin, 10 feet **Support 4K output**
W-HD0402-15FT HDMI V1.4 HDMI-plug
19 pin, 15 feet **Support 4K output**
W-HD0402-25 HDMI-plug 19 pin°C, 25 feet
Support 4K output
W-HD0402-50 HDMI-plug 19 pin, 50feet, 26AWG
Full Copper **Support 4K output**
W-HD0402-100FT-F HDMI-plug 19 pin, 4K
100FT HDMI **Active optical cable Support 4K output**

PREMADE CAT5E, CAT6 CABLE

Cable Type	Length	Support 4K output
W-CAT5E-1(White).....CAT 5E UTP Patch Cable	1ft	Yes
W-CAT5E-3(White).....CAT 5E UTP Patch Cable	3ft	Yes
W-CAT5E-6(Blue).....CAT 5E UTP Patch Cable	6ft	Yes
W-CAT5E-6(White).....CAT 5E UTP Patch Cable	6ft	Yes
W-CAT5E-10(White).....CAT 5E UTP Patch Cable	10ft	Yes
W-CAT5E-25(Blue).....CAT 5E UTP Patch Cable	25ft	Yes
W-CAT5E-25(White).....CAT 5E UTP Patch Cable	25ft	Yes
W-CAT5E-50(White).....CAT 5E UTP Patch Cable	50ft	Yes
W-CAT5E-100(White).....CAT 5E UTP Patch Cable	100ft	Yes
W-CAT5E-150(White).....CAT 5E UTP Patch Cable	150ft	Yes

Video Baluns & Ground Loop Isolators



W-HDVB202P-V2

HD-CVI, HD-TVI & AHD(**Up to 4K**)
• 1 CH Passive Video Balun
• Video transmission via UTP CAT5
• Outstanding interference rejection
• Transient protection
• High quality image with pigtail

W-HDVB202E-V2

HD-CVI, HD-TVI & AHD(**Up to 4K**)
• 1 CH Passive Video Balun
• Video transmission via UTP CAT5
• Outstanding interference rejection
• Transient protection
• High quality image

W-HDVB505P

HD-CVI, HD-TVI & AHD (**Up to 4K**)
• 1 CH passive HD video transmitter
• Pigtail BNC MALE

W-HDPVB303P

HD-CVI, HD-TVI & AHD
• 1 CH Passive Video Balun
• Up to Up to 330M (P to P) 1500M (P to A)
• Waterproof
• With Power



W-HDGB100-OSD

BNC Male to BNC Female
W/ Mini Cable on Both Sides
• Ground loop isolator function
• Built in video BALUN, perfect to work with DVR to immunity
• DVR interference for extra interference rejection

W-TGP600

BNC Male to Terminal Block
• Passive type
• No power required
• High Performance to eliminate ground loop problem
• Low video loss, Bandwidth: 20hz -11Mhz , +0/-3Db

W-HDPI200

• HD Ground Power Isolator.
• Prevents ground loop interference

W-HDVB208

HD-CVI, HD-TVI & AHD
8 CH Passive
Video Balun
(video transceiver)

BNC Connectors



W-CT5013/RG59 CRIMP

BNC-M/CRIMP
10pcs /Pack



W-CT5019/RG59T

BNC-M/Twist Connector
10pcs /Pack



W-CT5019/RG6T

BNC-M/Twist Connector
10pcs /Pack



W-CT5025

BNC/M to BNC/M
10pcs /Pack



W-CT5042/F-BNC

BNC/F to BNC/M
10pcs /Pack



W-CT5048/RCA/BNC

BNC/M to RCA/F
10pcs /Pack



W-CT5053/BNC

BNC/F to BNC/F
10pcs /Pack



W-CT5057

BNC/M to RAC/M
10pcs /Pack



W-CT5060/RCA/BNC

BNC/F to RCA/M
10pcs /Pack



W-CT5062/G

BNC Compression Gold
10pcs /Pack



W-CT5062/S

BNC Compression Silver
10pcs /Pack



W-CT5066/T

BNC/T type Connector
10pcs /Pack



W-CT5072

BNC Compression FEMALE
10pcs /Pack



W-CT5082/RG59

BNC RCA
MALE Compression
10pcs /Pack



W-PC100-V2

MALE Camera
Power Connector



W-PC101

FEMALE Camera
Power Connector



CN KEYSTONE RJ11 WH

RJ11 Toolless Keystone Jack, White

UL LISTED



CN HDMI COUPLER WH

HDMI Keystone style Snap-In Feed-through Coupler



CN SPKBPM

Gold-Plated Speaker Binding Post Modules
• 1 pair, Red & Black color band



CN C6KS180

CAT6 HDJ series 180° style
• 180° configuration for fast punch down
• Compatible with all faceplates, blank patch panels & surface mount boxes
• UL listed
• Color: White, Black, Blue



EZ- RJ45

UL LISTED

UL LISTED

UL LISTED

CN HDMI COUPLER WH

HDMI Keystone style Snap-In Feed-through Coupler

CN SPKBPM

Gold-Plated Speaker Binding Post Modules
• 1 pair, Red & Black color band

CN C6KS180

CAT6 HDJ series 180° style
• 180° configuration for fast punch down
• Compatible with all faceplates, blank patch panels & surface mount boxes
• UL listed
• Color: White, Black, Blue



W-P108

Easy Wire Passthrough RJ45 Connectors 100pcs per pack
• Easier to pass through the wire guide
• Terminals are more easily piercing to the cable core
• Make cables easier to pass Fluke test
• works with W-T5069



EZ- RJ45 Cat5e



EZ- RJ45 Cat5e



EZ- RJ45 Cat6



EZ- RJ45 Cat6



Coupler F to F Cat5e



Coupler F to F Cat6

P-RJ4505-50

Cat5E RJ45 pass through Modular Plug Use with network & telephone cable
50pcs /bag

P-RJ4505-100

Cat5E RJ45 pass through Modular Plug Use with network & telephone cable
100pcs /bag

P-RJ4506-50

Cat6 RJ45 pass through Modular Plug
50 pcs/bag

P-RJ4506-100

Cat6 RJ45 pass through Modular Plug
100 pcs/bag

P-RJ4505KSC-XX

CAT5E RJ45 Keyst Couple F to F
• 20pcs/pack
• Colors: White, Black, Blue, Yellow, Green, Red

P-RJ4506KSC-XX

CAT6 RJ45 Keyst Couple F to F
• 20pcs/pack
• Colors: White, Black, Blue, Yellow, Green, Red





W-SP1-2

One in Two out MALE POWER CONNECT SPLITTER



W-SP1-4

One in four out MALE POWER CONNECT SPLITTER



W-SP1-8

One in eight out MALE POWER CONNECT SPLITTER



W-CT5088

Pigtail CCTV camera power connector, MALE



W-CT5089

Pigtail CCTV camera power connector, FEMALE



W-CT5011

Blue-Beanie connector/outer shell: Plastic Type. Heat Shrink Tubing/ Metal Housing: Brass Inner Sleeve: Beryllium copper plated with Bright Nickel Contact Resistance
• 100pcs per bag

ELECTRICAL TAPE & TIE WRAPS



CN VELCRO 0.75" X 15

3-Pack Hook and Loop Fastening Tape 15 fts/roll, 0.75in
• Color :Black

<UL LISTED>



CN VELCRO 1" X 75

VELCRO® Brand ONE-WRAP® Tape 75 Fts/roll, 1in
• Color : Black

<UL LISTED>



CN ELE TAPE BLK-V2

• Color : UV Black
• Tensile: 18lb
• Length: 8.1"
• Width: 0.096
• Bundle Diameter:2.0



CN CABLE TIE WRAP MH (W)

CN CABLE TIE WRAP MH (B)

• Color : Natural or UV Black
• Tensile: 50lb
• Length: 8.1", Width: 18"
• Bundle Diameter: 2.0
• Mounting Head
• Bag Qty: 100
• UL LISTED



CN CT-8-50 UVBLK

CN CT-8-50 WHT

• Color : Clear White
• Length: 8"
• Bag Qty: 100

Installation Tools



W-CT2023

Wire Seating Tool
• For seating wire into terminal block or cut off wire end after terminated



W-T5021

Multi-Graded Wire Strippers
• For precision wire stripping of insulation
• Rubber coated grips for secure handling



W-T5089

Cable Tie & Fastening Tool
• Applicable width: 2.4-4.8mm & thickness up to 1.6mm
• Fasten & automatic cutting
• Adjustable binding pressure



TL5082R / CT-04

Professional Coax Multi Compression Tool
• For Waterproof Connectors "F", BNC, RCA/RG-58(3C), RG-59(4C), RG-6(5C)
• High impact plastic handles



W-T5082

Professional Coax Multi Compression Tool
• For Waterproof Connectors "F", BNC, RCA/RG-58(3C), RG-59(4C), RG-6(5C)
• High impact plastic handles



W-T5009

Professional Coax Multi Crimping Tool
• For crimping F, N, BNC, TNC, UHF, ST, SC, SMA, etc., connectors
• High impact plastic grips



W-CT5068

Multi-Function Telephone Tool
• Crimps, cuts & strips to make telephone RJ11 Network RJ45 terminals quick



P-RJ45CT

• RJ45 Pass Through Crimp Tool



W-T5069

EZ RJ45 NETWORK TOOL
• Suitable for wire installation into network and telecommunication equipment
• The head of tools which is made of special material makes tools more durable.



CN KT90180-J4PR

• Jack4pair, 4-Pair Termination Tool
• For 90-Degree & 180-Degree
• Keystone Jacks

Wireless Mouse



New Item



UVA WIRELESS MOUSE

- USB mini-receiver for 2.4 GHz wireless connection, Adjustable DIP Switch, up to 32 feet, Windows 98/ 2000/ME/ XP/ Vista/ 7/ 8/10/VISTA/ Mac OS

UVA WIRELESS MOUSE -V2

Dual Mode Wireless 5.1+2.4g Wireless Gaming Mouse, USB Rechargeable Mouse, Silent Backlight, Ergonomic

W-MP100

Microphone with power, Low noise, high-fidelity. Power: 6-12VD. Frequency: 100-5500Hz. Bug Rang: 30 square meters

W-MP350

Microphone with power, Low noise high-fidelity. Power: 6-12VD. Frequency: 300-5500Hz. Bug Rang: 5-30 square meters designed for 3.5mm stereo audio interface

AM-02

Amplified Microphone Device GOLF
 • Profesional CCTV Acoustic 70db Mic
 • Microphone, High Fidelity,
 • Transmit 3000m, Coverage 100m2, 12v

W-MP300

External Microphone with power, Low noise high-fidelity. Power: 6-12VD. Frequency: 300-5500Hz. Bug Rang: 100 square meters

Signs



W-SS-2

CCTV Warning Signs- Small Size, 2.5" x 2.5"

W-SS-3

CCTV Warning Signs- Big Size 11" x 18" Color : Red Plastic Warning Sign

W-SS-4

CCTV Warning Signs- Big Size 11" x 18" Color: Blue Plastic Warning Sign



DS-UTF32G-H1

- MLC NAND with Increased Service Life
- SMART Mechanism w/Real-Time Warnings
- Unique Read-Write Lock Security Mechanism
- Special Storage Algorithm with Longer Service Life
- Water, Shock, X-Ray, and Temperature Resistance

DS-UTF64G-H1

- MLC NAND with Increased Service Life
- SMART Mechanism w/Real-Time Warnings
- Unique Read-Write Lock Security Mechanism
- Special Storage Algorithm with Longer Service Life
- Water, Shock, X-Ray, and Temperature Resistance

DVR Lock Boxes



UVA DVR LOCK BOX SM

HEAVY DUTY STEEL DVR LOCK BOX SMALL
 • Built-in Fan
 • Size: 15"x15"x5"
 • Keys Inside

UVA DVR LOCK BOX MD

HEAVY DUTY STEEL DVR LOCK BOX MEDIUM
 • Built-in Fan
 • Size: 18"x18"x5"
 • Keys Inside

UVA DVR LOCK BOX LG

HEAVY DUTY STEEL DVR LOCK BOX LARGE
 • Built-in Fan
 • Size: 24"x21"x8"
 • Keys Inside

CCTV IP Tester

Cable Tracer



5 Inch

HDMT5500-T

- 5 Inch IP/Analog tester touch screen, 1920x1080 resolutions
- 8MP TVI, 8MP CVI, 8MP AHD, /H.265 IP, CVBS camera test
- H.265/H.264, 4K video display via mainstream
- Dahua, Hikvision etc ONVIF camera test
- VGA input, support 1920 x 1200P 60FPS*
- HDMI Input, support 4K 30FPS*
- Rapid ONVIF, Create the test report and modify IP address, etc
- Auto HD, auto recognize HD coax camera type and resolution
- DC12V 3A, 48V PoE power output
- RJ45 TDR cable test, cable quality test
- UTP cable test, detect the near-end, mid-end and far-end fault point of the RJ45 cable plug

Wall Plates



P-RJ45WP1P-W

1 Port RJ45 Keystone Coupler Wall Plate white

P-RJ45WP2P-W

2 Port RJ45 Keystone Coupler Wall Plate white

P-RJ45WP3P-W

3 Port RJ45 Keystone Coupler Wall Plate white

P-RJ45WP4P-W

4 Port RJ45 Keystone Coupler Wall Plate white

P-RJ45WP6P-W

6 Port RJ45 Keystone Coupler Wall Plate white



UL
LISTED



UL
LISTED



UL
LISTED



UL
LISTED

CN FPW02PWH

2 Port Single-Gang Flush Style with ID Windows Faceplate

CN FPW04PWH

4 Port Single-Gang Flush Style with ID Windows Faceplate

CN TFP01WH

1 Port Face Plate Surface, Compatible with Universal Modular Keystone Jacks

CN FP1CAT61F-WH

1 Port Flush Telephone Wall Plate, Integrated With 1 Cat6 & 1 Port 3GHz F-Type



UL
LISTED



UL
LISTED



UL
LISTED



UL
LISTED



UL
LISTED



UL
LISTED

CN DWIN-1P-WH

1 Port Decora Style Insert

CN DWIN-2P-WH

2 Port Decora Style Insert

CN DWIN-3P-WH

3 Port Decora Style Insert

CN DWIN-4P-WH

4 Port Decora Style Insert

CN DWIN-6P-WH

6 Port Decora Style Insert

CN DWP1G-WH

Decora 1-Gang Midway Wall Plate



CN FP-BLANK

Blank Wall Plate Outlet Cover



UL
LISTED



UL
LISTED



UL
LISTED



UL
LISTED

CN SMB01WH

1 Port Surface Mount Boxes

CN SMB02WH

2 Port Surface Mount Boxes

CN SMB04WH

4 Port Surface Mount Boxes

CN SMB06WH

6 Port Surface Mount Boxes



UL
LISTED



CN 1 GANG MOUNTING

J-Hook, Wall Mount Style
3/4 inch

CN BR150

J-Hook, Wall Mount Style
2 inch

CN BEAM CLAMP

J-Hook, Wall Mount Style
4 inch



CN CMJH34

J-Hook, Ceiling Mount Style
3/4 inch

CN CMJH02

J-Hook, Ceiling Mount Style
2 inch

CN CMJH04

J-Hook, Ceiling Mount Style
4 inch

CN WMJH34

J-Hook, Wall Mount Style
3/4 inch

CN WMJH02

J-Hook, Wall Mount Style
2 inch

CN WMJH04

J-Hook, Wall Mount Style
4 inch



CN DR02

Metal distribution "D" Ring
2 inch



CN DR03

Metal distribution "D" Ring
3 inch



CN DR05

Metal distribution "D" Ring
5 inch

Cable Management



Sale

P-NWPP-24P

24Port RJ45 Patch Panel Pass through Couple



Sale

P-NWPP-48P

48 Port RJ45 Patch Panel Pass through Couple



Sale

CN 5EPP12V

• Wall Mount CAT5e 110-Type 12-Port Patch Panel
• UL Listed



Sale

CN PP12PORT 19"

• 12-port Cat5e Keystone Patch Panel



UL LISTED

CN PP CAT6 24P

• 24-port Cat6 Patch Panel, 110 Type
• Fits into standard 19" equipment racks



New Item

CN PDU1012M-24

Power Distribution Unit (PDU)
• 1U, 12-outlets housing aluminum alloy housing
• Master switch on/off
• Master overload
• 4PCS. #12-24 screws
• 15A, 110V w/ 6.5' (2M) AC power cord
• Outlet Quantity: 2 Front / 10 Rear



New Item

CN SHELF-15SSV-S2PK

3U 15" Vented bottom, single-sided rack shelf, 2 pack
• 19 inch wide equipment
• Supporting objects up to 50 lbs
• Black powder coat finish



New Item

UL LISTED

CN PDH-SS-2U

19" wide slotted flexible finger duct
• Large two rear opening for cable entry and exit
• Snap-on cover
• 2U measures (W) 19", (H) 3.47", (D) 3.23"

Cabinets



6U

New Item

CN CBTF-WM6U

Double Section Swing Out 6U Wall Mount Cabinets
• Built-in Fan
• Cable entry and exit on top and bottom knockouts
• Reversible right or left handed front door
• 90 lbs load capacity when properly secured
• Size: 23.6"x14.6"x23.6"
• Keys Inside



9U

New Item

CN CBTF-WM9U

Double Section Swing Out 9U Wall Mount Cabinets
• Built-in Fan
• Cable entry and exit on top and bottom knockouts
• Reversible right or left handed front door
• 90 lbs load capacity when properly secured
• Size: 23.6"x19.8"x23.6"
• Keys Inside



12U

New Item

CN CBTF-WM12U

Double Section Swing Out 12U Wall Mount Cabinets
• Built-in Fan
• Cable entry and exit on top and bottom knockouts
• Lockable front, rear doors and side panels
• Reversible right or left handed front door
• 130 lbs load capacity when properly secured
• Size: 23.6"x25.2"x23.6"
• Keys Inside



15U

New Item

CN CBTF-WM15U

Double Section Swing Out 15U Wall Mount Cabinets
• Built-in Fan
• Cable entry and exit on top and bottom knockouts
• Lockable front, rear doors and side panels
• Reversible right or left handed front door
• 130 lbs load capacity when properly secured
• Size: 23.6"x30.3"x23.6"
• Keys Inside




18U

New Item

CN CBTF-WM18U-103

Double Section Swing Out 18U Wall Mount Cabinets
• Built-in Fan
• Cable entry and exit on top and bottom knockouts
• Lockable front, rear doors and side panels
• Reversible right or left handed front door
• 130 lbs load capacity when properly secured
• Size: 23.6"x35.6"x23.6"
• Keys Inside

AUDIO SUPPLIES



AU-T-610

- Universal Bridge Support/ Mounting Bracket/ For Drop Ceiling Mounting Applications/Fit Standard 2' X 2' And 2' X 4' Ceiling Grids/ Good For lws-65bt

AU-SPK-610 CXBT / WG

- Indoor/Outdoor 2-way Weatherproof/ 70V/25V/ 8 ohm selectable/ 5W, 10W, 15W, 20W, 30W/ Frequency Response: 45-22,000 Hz/ UV and saltwater proof

AU-SPK-825CX-8"

- Indoor 8" COAX CEILING SPK 60W PAIR

AU-SPK-SB700T W/B

- Indoor/Outdoor 2-way Weatherproof/ 70V/25V/ 8 ohm selectable/ 5W, 10W, 15W, 20W, 30W/ Frequency Response: 45-22,000 Hz/ UV and saltwater proof

AU-AMP-TCM-4

- AM/FM Tuner/CD module
- Selectable frequency band for US
- RDS (Radio Date System)
- Music on hold output
- LCD with blue backlight
- DC power input

HD Monitors

- Monitors / TV 22 inch ~ 32 inch comes with: HDMI & VGA Inputs



Call for price

HDMI EXTENDER / SPLITTERS



P-HDMI 1X2 4K

HDMI 1 IN 2 OUT Splitter

- Support HDMI 1.4b
- Support Full 3D
- Support HDMI resolution up to 3840x2160/30Hz
- Support the max baud rate of 3.4G and max bandwidth of 340Mhz
- Support deep color 8/10/12bit
- Displaying single source, multi-output high-definition signal source from DVD player A/V receiver, set-top box
- 5V/1A power adapter



P-HDMI 1X4 4K

HDMI 1 IN - 4 OUT Splitter

- Support HDMI 1.4b version
- Support 3D video format
- Support high resolution up to 3840x2160/30Hz
- Support AWG26 HDMI standard cable: input up to 20 meters,output up to 20 meters.
- (when the resolution is 4K, input up to 15 meters, output up to 15 meters.)
- Support one single HDMI source accessing to multiple HDMI sinks, the source can be DVD player, A/V receiver, set top box and etc.



P-HDMI-ED100M-4K

4k HDMI EXTENDER

- Support 100m (328fts) long distance transmission (Cat 6)
- Low power consumption, low temperature and high safety;
- Support 3D video format;
- Both the TX and RX support 3.5MM left and right audio output, Support IR control



Loop Out

P-HDMI-ED100M-4KL

4K HDMI EXTENDER

- Support local loop-out
- Support 100m (328fts) long distance transmission (Cat 6)
- Low power consumption, low temperature and high safety;
- Support 3D video format;
- Both the TX and RX support 3.5MM left and right audio output, Support IR control;



P-HDMI SW2X4

Switch Splitter 2 x 4 HDMI 2.0

- Downscaling (can output 4K and 1080p at the same time)
- High Definition,it can support 4K/60Hz RGB/ YUV 4:4:4;
- Transmission long distance,4K/60Hz up to 10 meters ,1080p up to 20meters.



Loop Out

W-HDA/HDMI-100

- Support up to AHD 8MP, TVI 8MP, CVI 8MP test
- CVI/TVI/AHD+CVBS to HDMI, HDMI output 1080P
- Connect HD Monitor, HD coaxial output HDMI Input Display simultaneous
- One channel AHD/TVI/CVI/CVBS loop out
- Auto recognition 720P/1080P/3MP/4MP/5MP/8MP resolution, indicator visual display



Loop Out

P-HDMI ED120-KVM-4K

Support HDMI 1.4/HDCP1.4

- Support local loop-out
- Support 120m long distance transmission
- Low power consumption, low temperature and high safety
- Both the TX & RX support 3.5MM left & right audio output
- Support IR control
- Support USB mouse & keyboard extension

LCD Monitor Mounts



W-LB104-V2

- Tilt Wall Bracket/Most 13"-27" Flat Panel TVs
- Compatibility Sizes: 13" ~ 27"
 - Max. Weight Capacity : 20kg/44lbs
 - VESA Standard: 75x75, 100x100
 - Tilt: 10° ~ -15°
 - Mounting profile: 36mm



W-LB55-V2

- Economy Steel Full-motion TV Wall Mount Ceiling Bracket
- Compatibility Sizes: 13" ~ 42"
 - Max. Weight Capacity : 20kg/44lbs
 - VESA Standard: 75x75, 100x100, 200x100, 200x200
 - Tilt: +5° ~ -12°
 - Swivel: -90° ~ 90°
 - Mounting profile: 60-364mm



W-LB105

- Free Standing Adjustable Monitor Mount
- Compatibility Sizes: 13" ~ 27"
- Dual Monitor Stand
- 360° Rotation, -/+90° Tilt and +90° Swivel
- Height Adjustable
- Support Free Standing and Grommet Mounting



PB2655

- Super Economy Tilt TV Wall Mount
- Compatibility Sizes: 26" ~ 55"
 - Max. Weight Capacity : 40kg/88lbs
 - VESA Standard: 75*75, 100*100, 200*200, 400*400
 - Tilt: 0° ~ -8°



W-PB24-V2

- Super Economy Tilt TV Wall Mount
- Compatibility Sizes: 37" ~ 70"
 - Max. Weight Capacity : 40kg/88lbs
 - VESA Standard: 200x200, 400x200, 300x300, 600x400
 - Tilt: 12° ~ -12°
 - Mounting profile: 53mm



W-PB42-V2

- Economy Full-Motion TV Wall Mount
- Compatibility Sizes: 35" ~ 55"
 - Max. Weight Capacity : 50kg/110lbs
 - VESA Standard: 200x200, 400x200, 300x300, 400x400,
 - Tilt: +10° ~ -20°
 - Swivel: -60° ~ 60°
 - Mounting profile : 64-510mm



PB3770

- Economy Full-Motion TV Wall Mount
- Compatibility Sizes: 37" ~ 70"
 - Max. Weight Capacity : 40kg/88lbs
 - VESA Standard: 75*75, 100*100, 200*100, 200*200, 400*400, 600*400
 - Tilt: +15° ~ -15°
 - Swivel: -60° ~ 60°
 - Mounting profile : 70-460mm



PB4085

- Plasma Ceiling Bracket
- Compatibility Sizes: 40" ~ 85"
 - Max. Weight Capacity : 59kg/130lbs
 - VESA: 75*75, 100*100, 200*200, 400*400, 800*800
 - Tilt: +15° ~ -15°



W-LB504A

- Full Motion Ceiling Bracket
- Compatibility Sizes: 13" ~ 27"
 - Length 24"-33" (608mm-858mm)
 - Max. Weight Capacity : 30kg/66lbs
 - VESA Standard: 50x50, 75x75, 100x100
 - Tilt: +20° ~ -20°
 - Swivel: -90° ~ 90°
 - Mounting profile: 625-875mm



W-PB01

- Plasma Ceiling Bracket
- Max. Weight Capacity : 75kg/165lbs
 - Swivel: -180° ~ 180°
 - Mounting profile: Ceiling
 - To be assembled with W-PB-14-V2



W-PB03

- Ceiling Bracket
- Compatibility Sizes: 23" ~ 42"
 - Max. Weight Capacity : 45kg/99lbs x2
 - VESA Standard: 100x100, 200x100, 200x200
 - Tilt: +5° ~ -20°
 - Swivel: -180° ~ 180°
 - Mounting profile: Ceiling



W-PB04

- Telescopic Full-Motion TV Ceiling Mounts Ceiling Bracket
- Compatibility Sizes: 37" ~ 70"
 - Length 41"-61" (1060-1560mm)
 - Max. Weight Capacity : 50kg/110lbs
 - VESA Standard: 200x200, 300x300, 400x200, 400x400, 600x400
 - Tilt: 0° ~ -25°
 - Swivel: -180° ~ 180°
 - Mounting profile: Ceiling



W-PB05

- Back-to-Back Flat Panel Ceiling M. Bracket
- Compatibility Sizes: 37" ~ 70"
 - Max. Weight Capacity : 45kg/99lbs x2
 - VESA Standard: 200x200, 300x300, 400x200, 400x400, 600x400
 - Tilt: +5° ~ -20°
 - Swivel: -180° ~ 180°
 - Mounting profile: Ceiling



GSS NEW YORK

59-43 Fresh Meadow Lane
Fresh Meadows, NY 11365
(718)767-0099
nysales@gogss.com
我们说中文
Hablamos Español

GSS LONG ISLAND, NY

789 Old Country Road,
Westbury, NY 11590
(862)310-0400
njsales@gogss.com
我们说中文

GSS CALIFORNIA

15222 Stafford Street
City of Industry, CA 91744
(323)234-2835
casales@gogss.com
我们说中文
Hablamos Español

- **Competitive Pricing**
- **Free Security Solution Consultation**
- **Free Technical Support**
- **Fast Shipping**
- **Local Pick-up**

GSS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. GSS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective 10/01/2024. GSS offers 3 years warranty on Red|Line products (2 years warranty on Red|Line PTZ), 2 years warranty on Blue|Line products (1 year warranty on Blue|Line PTZ), 1 year warranty on Green|Line and Grey|Line products unless otherwise specified. © 2020 GSS.



GSS
YouTube Channel



GSS
Instagram



GSS
Facebook



GSS
Website